

JOB # 28
NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

IM-6-029(132)153

Grand Forks County
7 Southof ND 54 - NB/SB



Bridge Deck Overlays

	STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
	ND	IM-6-029(132)153	21378	1	1

GOVERNING SPECIFICATIONS:

2014 Standard Specifications adopted by the North Dakota
Department of Transportation and the Supplemental Specifications
effective on the date the project is advertised.

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
IM-6-029(132)153	.10	.10

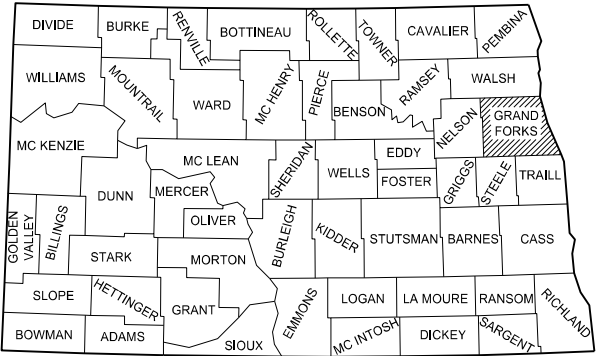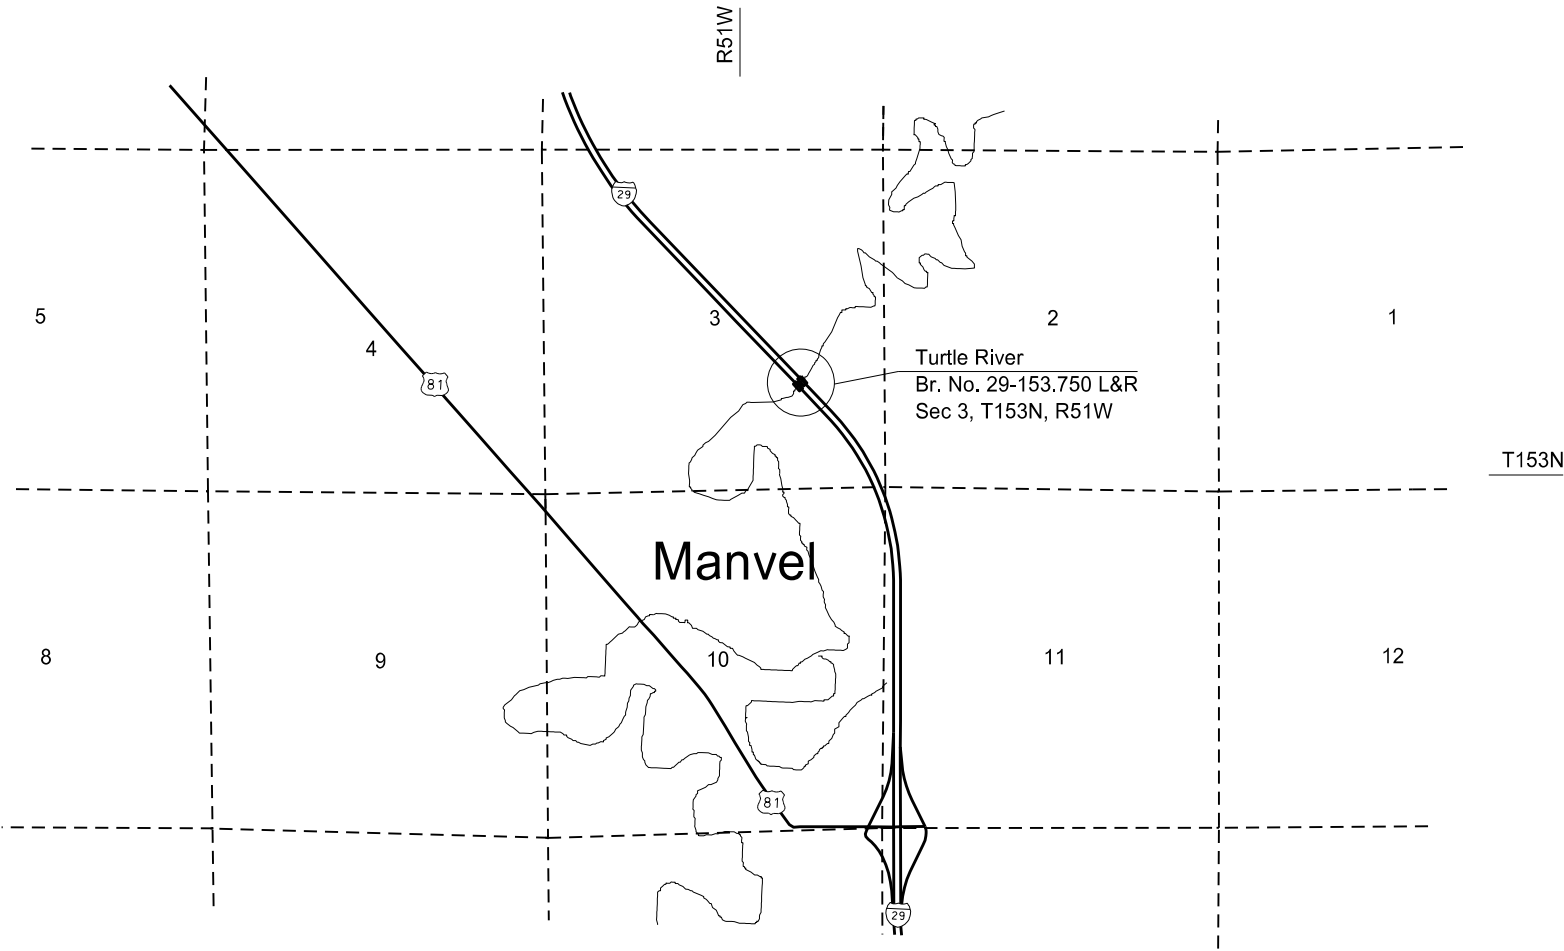

STATE COUNTY MAP

I hereby certify that the attached plans were prepared by me or under my direct supervision and that I am a duly registered professional engineer under the laws of the state of ND.

APPROVED DATE 02/12/2016

Terrence R. Udland
NDDOT BRIDGE DIVISION

This document was originally issued and sealed by Terrence R. Udland Registration Number PE- 2674 , on 02/12/2016and the original document is stored at the North Dakota Department of Transportation

TABLE OF CONTENTS						STATE	PROJECT NO.	SECTION NO.	SHEET NO.
						ND	IM-6-029(132)153	2	1
PLAN SECTIONS			LIST OF STANDARD DRAWINGS						
Section	Page(s)	Description	Number	Description					
1	1	Title Sheet	D-101-1, 2, 3	NDDOT Abbreviations					
2	1	Table of Contents	D-101-10	NDDOT Utility Company and Organization Abbreviations					
6	1	Notes	D-101-20, 21	Line Styles					
6	2	Environmental Commitments	D-101-30, 31, 32	Symbols					
8	1	Estimate of Quantities	D-704-1	Attenuation Device					
10	1	Basis of Estimate	D-704-5	Construction Sign Detail					
100	1 - 2	Work Zone Traffic Control	D-704-7	Breakaway Systems for Construction Zone Signs - Perforated Tube					
170	1 - 6	Bridges Details	D-704-8	Breakaway Systems for Construction Zone Signs - U-Channel Post					
			D-704-9	Construction Sign Details - Terminal and Guide Signs					
			D-704-10	Construction Sign Details - Regulatory Signs					
			D-704-11	Construction Sign Details - Warning Signs					
			D-704-12	Shoulder Closure Tapers					
			D-704-13	Barricade and Channelizing Device Details					
			D-704-14	Construction Sign Punching and Mounting Details					
			D-704-18	Sign Layout for Interstate System One Lane Closure					
			D-704-22	Construction Truck and Temporary Detour Layouts					
			D-704-27	Traffic Control Plan for Moving Operations					
			D-704-51	Portable Precast Concrete Median Barrier (Temporary Usage)					
SPECIAL PROVISIONS									
Number	Description								
SP 0004(14)	Federal Migratory Bird Treaty Act								

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	IM-6-029(132)153	6	1

NOTES

704-P01 TRAFFIC CONTROL DEVICES: The traffic control devices list has been developed using the list below and traffic control layouts shown in the plans:

D-704-18, Sign layout for Interstate System One-Lane Closure. Devices provided for two – one lane closures used simultaneously, one on each roadway. Each bridge will require a right and a left lane closure.

D-704-22, Layouts Type K & L for Construction Truck Hauling Material.

704-200 PRECAST CONCRETE MEDIAN BARRIERS – STATE FURNISHED: Obtain 108 barriers from the NDDOT storage yard in Grand Forks. Return barriers to the NDDOT storage yard in Grand Forks.

Some 4 inch x 4 inch boards are available at the return location. Provide any additional 4 inch x 4 inch boards necessary to stack barriers. The boards will become property of the Department. Include the cost for boards in the contract unit price for "Precast Concrete Median Barrier - State Furnished".

This document was originally issued and sealed by Ranka Samardzic, Registration Number PE-4888, on 02/11/16 and the original document is stored at the North Dakota Department of Transportation.

ENVIRONMENTAL COMMITMENTS

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	IM-6-029(132)153	6	2

ENVIRONMENTAL COMMITMENTS (EC): The North Dakota Department of Transportation and the Federal Highway Administration have made environmental commitments to secure approval of this project. The environmental commitments are as follows:

Based on the NEPA documentation, no additional permits or environmental commitments have been identified beyond what is covered by the NDDOT’s Standard Specification of Road and Bridge Construction.

Wetland Number	Cowardin Classification	Wetland Type	Wetland Size (acres)	Wetland Feature	USACE Jurisdictional Wetlands	Impacts to Wetlands	
						Temp.	Perm.
There are a number of adjacent wetlands within the project limits; however, no impacts are anticipated within the limits of construction.							
TOTALS:				0.00		0.00	0.00

ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	IM-6-029(132)153 SS-6-066(026)111	8	1

SPEC	CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
----	----	-----	----		-----
103	0100	CONTRACT BOND	L SUM	0.66	0.66
602	0130	CLASS AAE-3 CONCRETE	CY	4.08	4.08
650	0704	OVERLAY CONCRETE	CY	117.5	117.5
702	0100	MOBILIZATION	L SUM	0.66	0.66
704	1000	TRAFFIC CONTROL SIGNS	UNIT	1,818	1,818
704	1045	ATTENUATION DEVICE-TYPE B-75	EA	2	2
704	1060	DELINEATOR DRUMS	EA	78	78
704	1087	SEQUENCING ARROW PANEL-TYPE C	EA	2	2
704	3510	PRECAST CONCRETE MED BARRIER-STATE FURNISHED	EA	108	108
762	0420	SHORT TERM 4IN LINE-TYPE R	LF	9,500	9,500
762	1104	PVMT MK PAINTED 4IN LINE	LF	1,020	1,020
762	1305	PREFORMED PATTERNED PVMT MK 4IN LINE-GROOVED	LF	128	128
ALTERNATE 'A' ALTERNATE 'A' MECHANICAL DEMOLITION 29-153.750L					
650	0720	CLASS 1 REMOVAL	SY	1,048.3	1,048.3
650	0721	CLASS 2 REMOVAL	SY	323.4	323.4
650	0722	CLASS 2-A REMOVAL	LF	582	582
650	0723	CLASS 3 REMOVAL	SY	52.4	52.4
650	0724	CLASS 4 REMOVAL	SY	10.5	10.5
ALTERNATE 'B' ALTERNATE 'B' HYDRODEMOLITION 29-153.750L					
650	0710	CLASS 1-H REMOVAL	SY	1,048.3	1,048.3
650	0711	CLASS 2-H REMOVAL	SY	323.4	323.4
650	0712	CLASS 3-H REMOVAL	SY	62.9	62.9
ALTERNATE 'C' ALTERNATE 'C' MECHANICAL DEMOLITION 29-153.750R					
650	0720	CLASS 1 REMOVAL	SY	1,048.3	1,048.3
650	0721	CLASS 2 REMOVAL	SY	443.2	443.2
650	0722	CLASS 2-A REMOVAL	LF	797.8	797.8
650	0723	CLASS 3 REMOVAL	SY	52.4	52.4
650	0724	CLASS 4 REMOVAL	SY	10.5	10.5
ALTERNATE 'D' ALTERNATE 'D' HYDRODEMOLITION 29-153.750R					
650	0710	CLASS 1-H REMOVAL	SY	1,048.3	1,048.3
650	0711	CLASS 2-H REMOVAL	SY	443.2	443.2
650	0712	CLASS 3-H REMOVAL	SY	62.9	62.9

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	IM-6-029(132)153	10	1

Short Term 4in Line - Type R (2 Applications)		
Location	Basis	Quantity (LF)
I29 - RP 153.750 R	5,280 LF/mile	4,750
I29 - RP 153.750 L	5,280 LF/mile	4,750
Total		9,500

White Edge Lines - Pvmnt Mk Painted 4in Line		
Location	Basis	Quantity (LF)
I29 - RP 153.750 R	5,280 LF/mile	255
I29 - RP 153.750 L	5,280 LF/mile	255
Total		510


Yellow Edge Lines - Pvmnt Mk Painted 4in Line		
Location	Basis	Quantity (LF)
I29 - RP 153.750 R	5,280 LF/mile	255
I29 - RP 153.750 L	5,280 LF/mile	255
Total		510

White Skip - Preformed Patterned Pvmnt Mk 4in Line - Grooved		
Location	Basis	Quantity (LF)
I29 - RP 153.750 R	1,320 LF/mile	64
I29 - RP 153.750 L	1,320 LF/mile	64
Total		128

This document was originally issued and sealed by Ranka Samardzic Registration Number PE- 4888, on 02/11/16 and the original document is stored at the North Dakota Department of Transportation

Basis of Estimate
Bridge Deck Overlay
Turtle River - 7 Miles South of ND 54


	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	IM-6-029(132)153	100	2

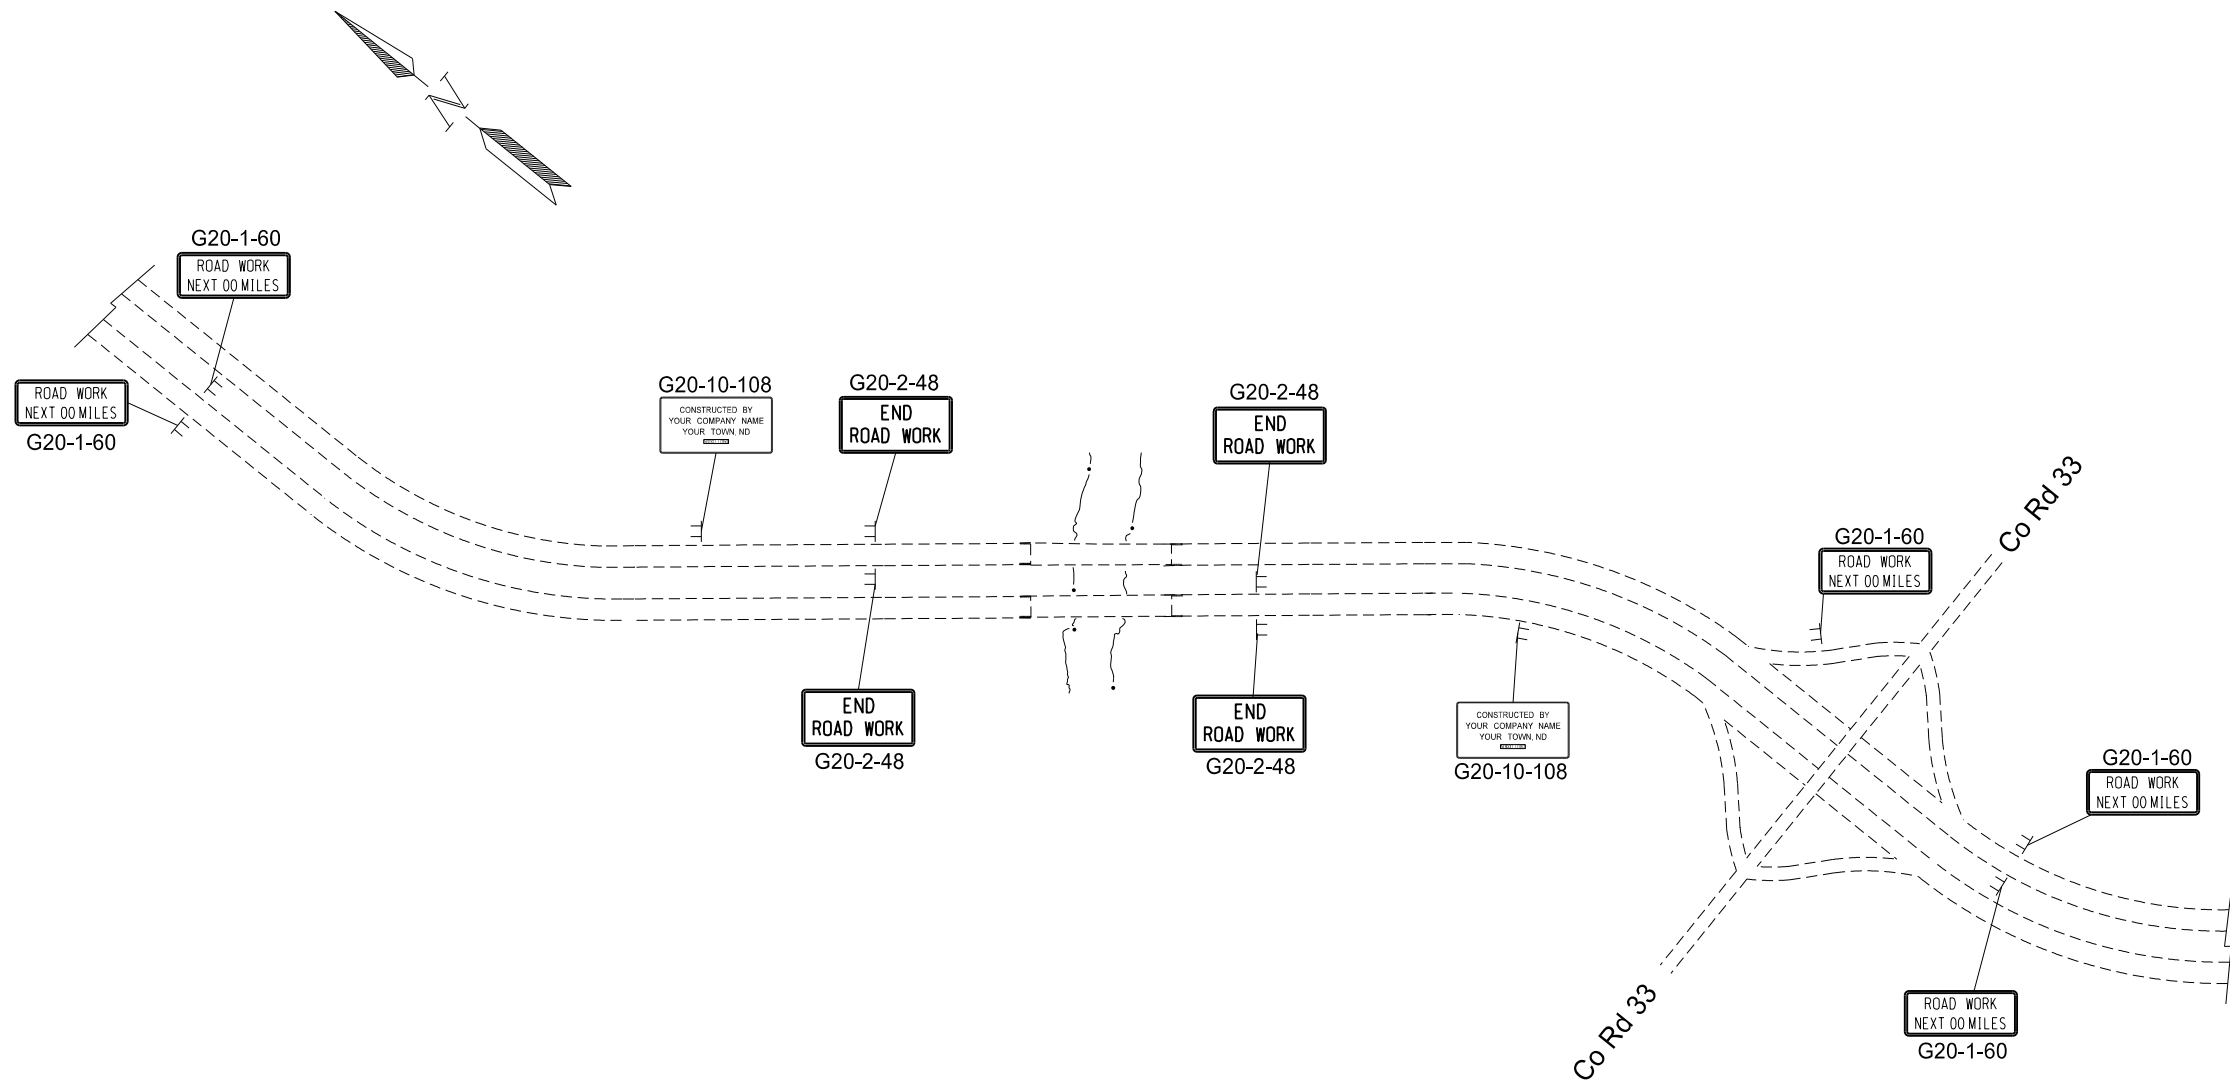

This document was originally issued and sealed by
Ranka Samardzic
Registration Number
PE- 4888,
on 02/11/16 and the original document is stored at the
North Dakota Department
of Transportation

WORK ZONE TRAFFIC CONTROL
Bridge Deck Overlay
Turtle River - 7 Miles South of ND 54

STATE	PROJECT NUMBER	SECTION NO.	SHEET NO.
ND	IM-6-029(132)153	170	1

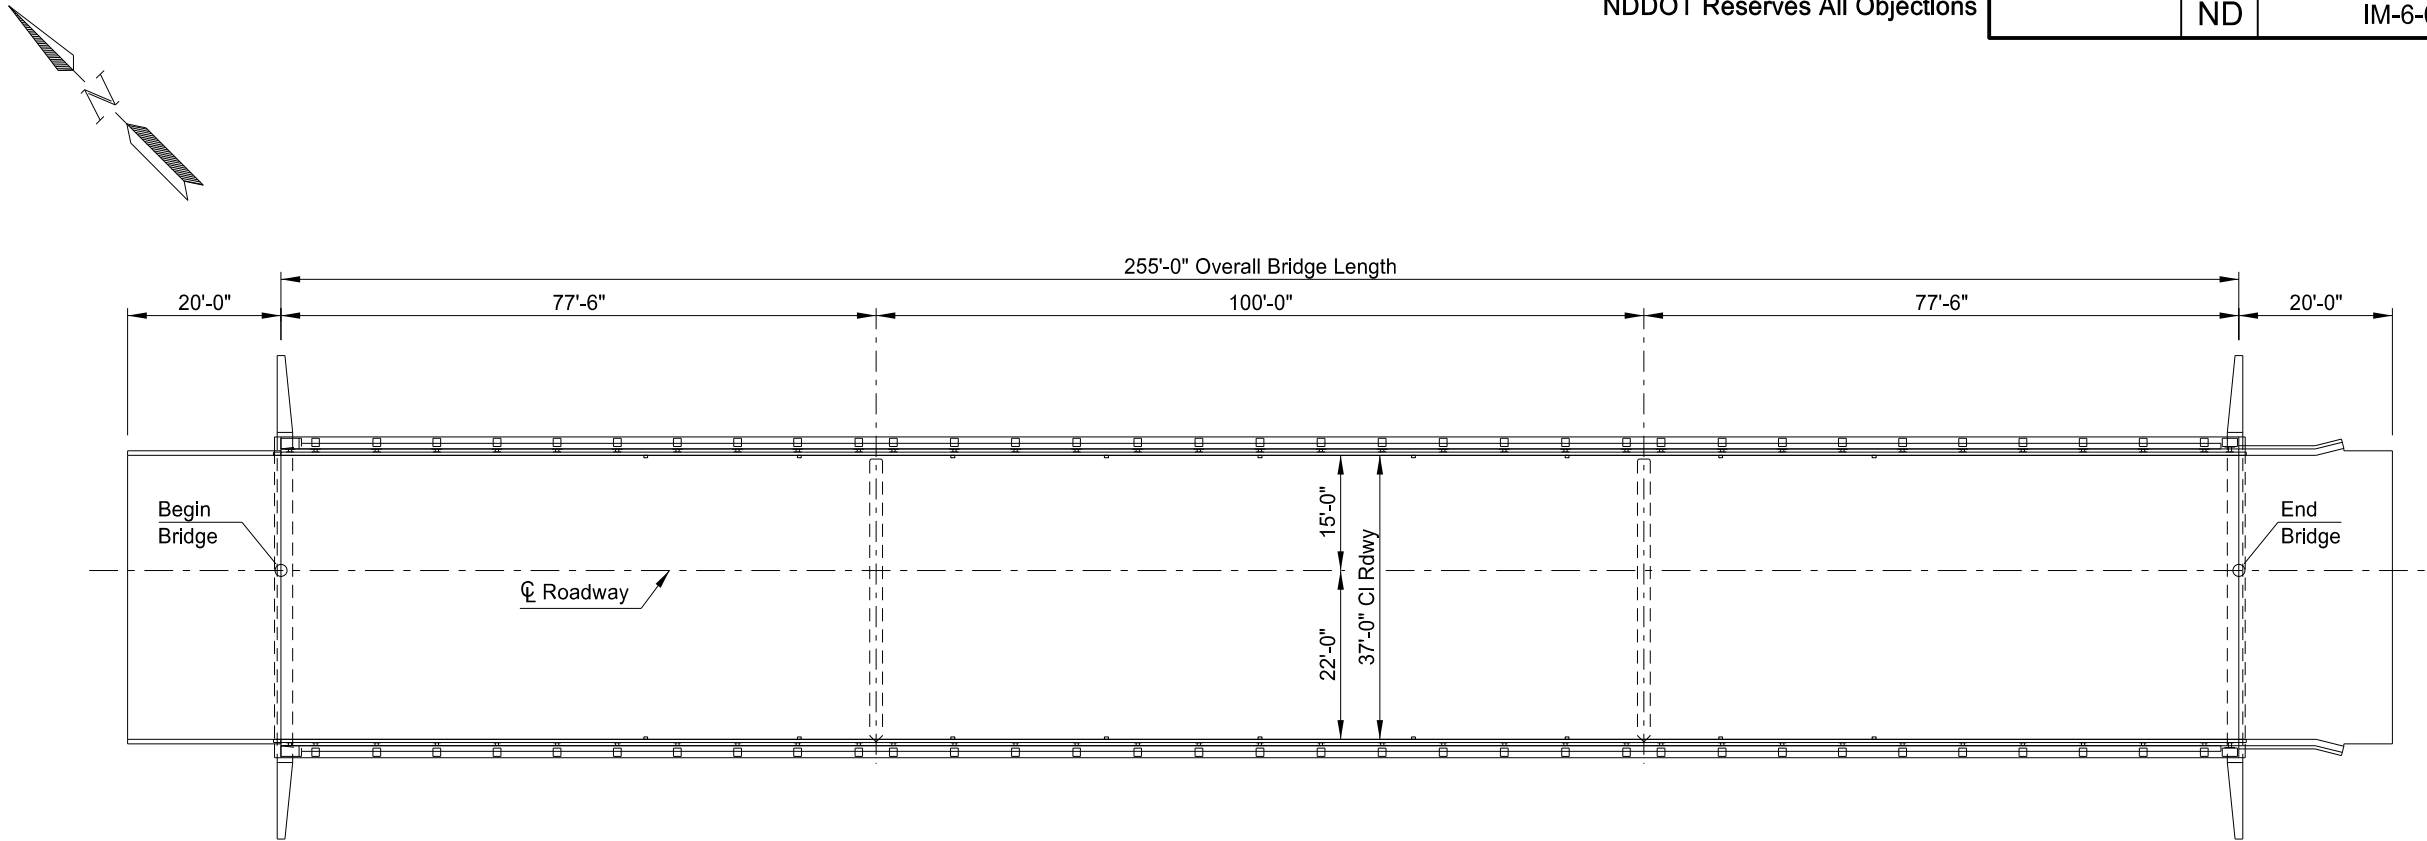

PLAN

BRIDGE BID ITEMS

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
602	0130	CLASS AAE-3 CONCRETE	CY	2.04
650	0704	OVERLAY CONCRETE	CY	56.7

BRIDGE BID ITEMS - ALTERNATIVE A MECHANICAL DEMOLITION

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
650	0720	CLASS 1 REMOVAL	SY	1048.3
650	0721	CLASS 2 REMOVAL	SY	323.4
650	0722	CLASS 2-A REMOVAL	LF	582
650	0723	CLASS 3 REMOVAL	SY	52.4
650	0724	CLASS 4 REMOVAL	SY	10.5

BRIDGE BID ITEMS - ALTERNATIVE B HYDRODEMOLITION

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
650	0710	CLASS 1-H REMOVAL	SY	1048.3
650	0711	CLASS 2-H REMOVAL	SY	323.4
650	0712	CLASS 3-H REMOVAL	SY	62.9

This document
was originally issued and
sealed by Lindsay Bossert
Registration Number PE 8395
on 02/09/2016 and the original
document is stored at the North
Dakota Department of
Transportation

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

TURTLE RIVER


BRIDGE LAYOUT

PROJECT: SIM-6-029(132)153


GRAND FORKS COUNTY

DATE 02/12/2016 Terrence R. Udland
BRIDGE ENGINEER


	STATE	PROJECT NUMBER	SECTION NO.	SHEET NO.
	ND	IM-6-029(132)153	170	2

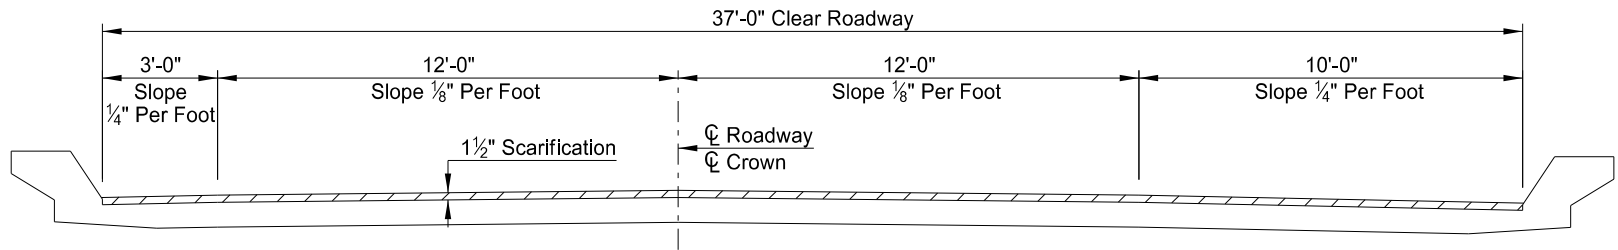


(SHOWING REMOVAL)
TYPICAL DECK SECTION

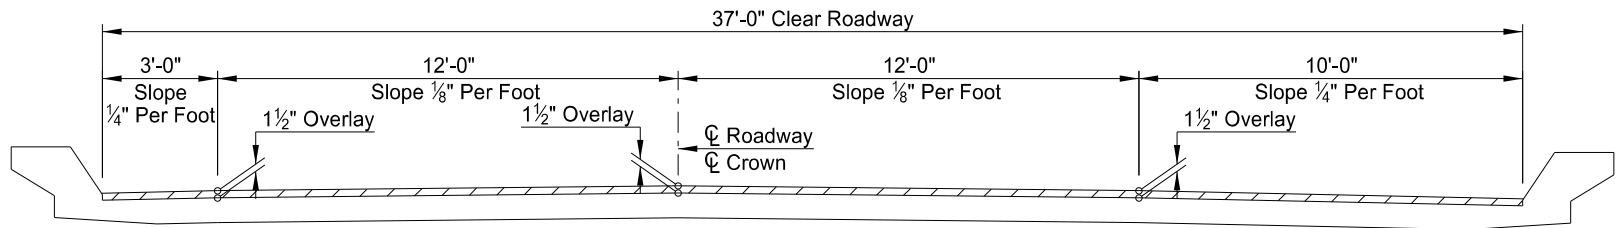

(SHOWING OVERLAY)
TYPICAL DECK SECTION

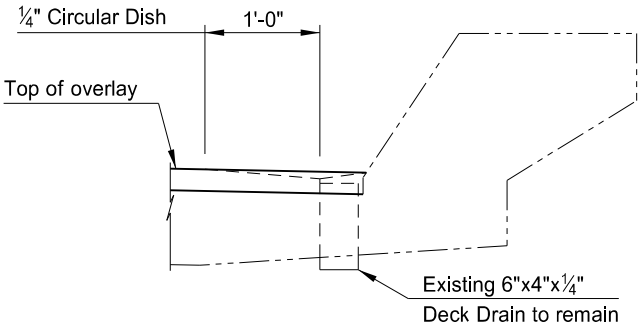

DECK DRAIN DETAIL

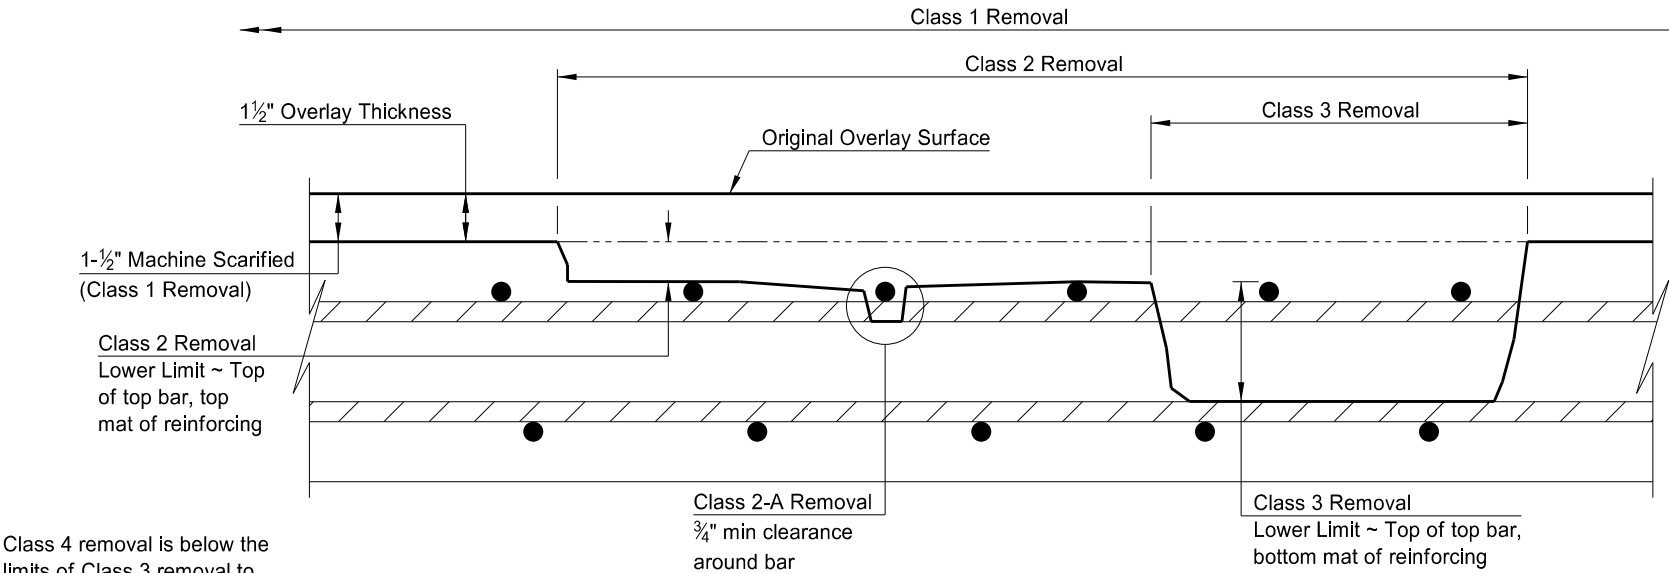

(OVERLAY CLASSIFICATIONS)
BRIDGE DECK SECTION

NOTE:

- 100 SCOPE OF WORK: Work at this site consists of a bridge deck overlay.
- Maintain one lane of traffic across the bridge at all times.
- 602 CONCRETE: Provide aggregate for concrete that meets the requirements of Section 802.01 C.2, "Coarse Aggregate" and Section 802.01 C. 3, "Fine Aggregate."
- 650 CLASS 2-A REMOVAL: Class 2-A removal is paid for the top bar in the top mat of reinforcing only.
- 650 OVERLAY CONCRETE: Use size 5 coarse aggregate composed of crushed stone. Use crushed stone that has at least one fractured face on 75 percent of the particles retained on the number 4 sieve.
- Placement of overlay concrete after September 15 requires authorization from the Bridge Engineer.


QUANTITIES	
CLASS AAE-3 CONCRETE	2.04 CY
OVERLAY CONCRETE	56.7 CY
CLASS 1 REMOVAL	1048.3 SY
CLASS 2 REMOVAL	323.4 SY
CLASS 2-A REMOVAL	582 LF
CLASS 3 REMOVAL	52.4 SY
CLASS 4 REMOVAL	10.5 SY

This document was originally issued and sealed by Lindsay Bossert Registration Number PE 8395 on 02/09/2016 and the original document is stored at the North Dakota Department of Transportation


TURTLE RIVER

DECK OVERLAY DETAILS
(ALTERNATIVE A)

	STATE	PROJECT NUMBER	SECTION NO.	SHEET NO.
	ND	IM-6-029(132)153	170	3

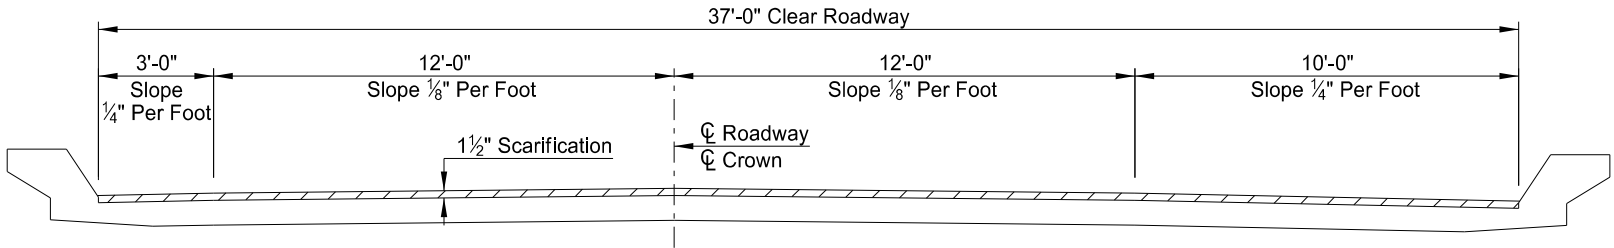


(SHOWING REMOVAL)
TYPICAL DECK SECTION

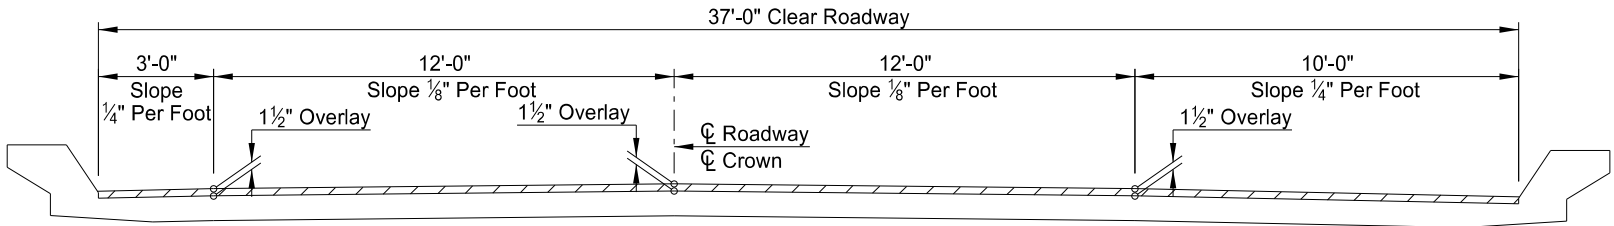

(SHOWING OVERLAY)
TYPICAL DECK SECTION

NOTE:

- 602 CONCRETE: Provide aggregate for concrete that meets the requirements of Section 802.01 C.2, "Coarse Aggregate" and Section 802.01 C. 3, "Fine Aggregate."
- 650 OVERLAY CONCRETE: Use size 5 coarse aggregate composed of crushed stone. Use crushed stone that has at least one fractured face on 75 percent of the particles retained on the number 4 sieve.
- Place overlay concrete before September 15 unless authorized by the Bridge Engineer.
- 650 CLASS 2-H REMOVAL: The "Class 2-H Removal" shall only be paid on areas that receive a second pass from the hydrodemolition machine.
- 650 CLASS 3-H REMOVAL: The "Class 3-H Removal" shall only be paid on areas that receive a third pass from the hydrodemolition machine.

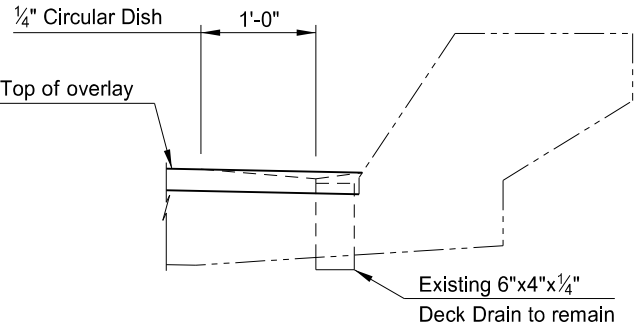

DECK DRAIN DETAIL



QUANTITIES	
CLASS AAE-3 CONCRETE	2.04 CY
OVERLAY CONCRETE	56.7 CY
CLASS 1-H REMOVAL	1048.3 SY
CLASS 2-H REMOVAL	323.4 SY
CLASS 3-H REMOVAL	62.9 SY

This document was originally issued and sealed by Lindsay Bossert Registration Number PE 8395 on 02/09/2016 and the original document is stored at the North Dakota Department of Transportation

TURTLE RIVER

DECK OVERLAY DETAILS
(ALTERNATIVE B)

STATE	PROJECT NUMBER	SECTION NO.	SHEET NO.
ND	IM-6-029(132)153	170	4

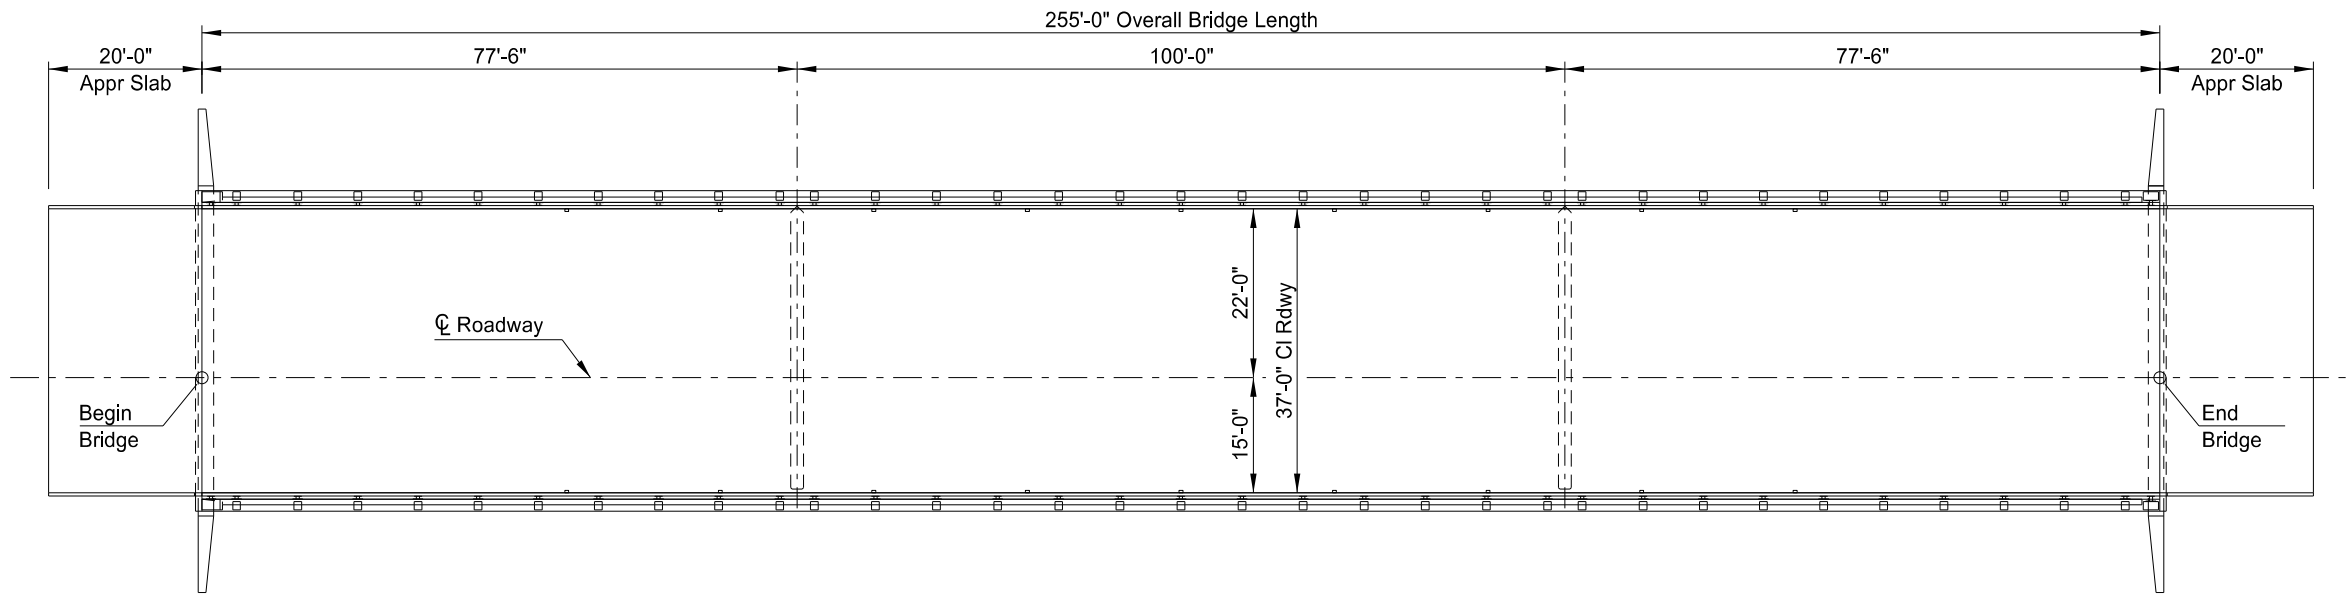

PLAN

BRIDGE BID ITEMS

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
602	0130	CLASS AAE-3 CONCRETE	CY	2.04
650	0704	OVERLAY CONCRETE	CY	60.8

BRIDGE BID ITEMS - ALTERNATIVE C MECHANICAL DEMOLITION

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
650	0720	CLASS 1 REMOVAL	SY	1048.3
650	0721	CLASS 2 REMOVAL	SY	443.2
650	0722	CLASS 2-A REMOVAL	LF	797.8
650	0723	CLASS 3 REMOVAL	SY	52.4
650	0724	CLASS 4 REMOVAL	SY	10.5

BRIDGE BID ITEMS - ALTERNATIVE D HYDRODEMOLITION

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
650	0710	CLASS 1-H REMOVAL	SY	1048.3
650	0711	CLASS 2-H REMOVAL	SY	443.2
650	0712	CLASS 3-H REMOVAL	SY	62.9

This document
was originally issued and
sealed by Lindsay Bossert
Registration Number PE 8395
on 02/09/2016 and the original
document is stored at the North
Dakota Department of
Transportation

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

TURTLE RIVER


BRIDGE LAYOUT

PROJECT: SIM-6-029(132)153


GRAND FORKS COUNTY

DATE: 02/12/2016
BRIDGE ENGINEER: Terrence R. Udland


STATE	PROJECT NUMBER	SECTION NO.	SHEET NO.
ND	IM-6-029(132)153	170	5

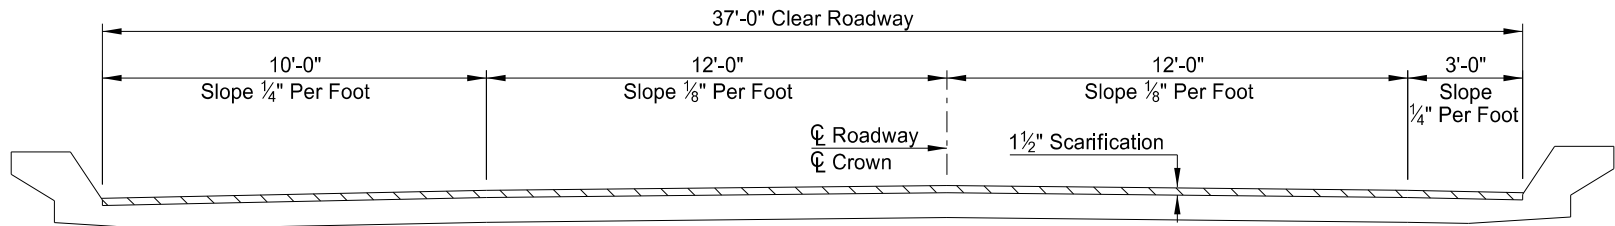


(SHOWING REMOVAL)
TYPICAL DECK SECTION

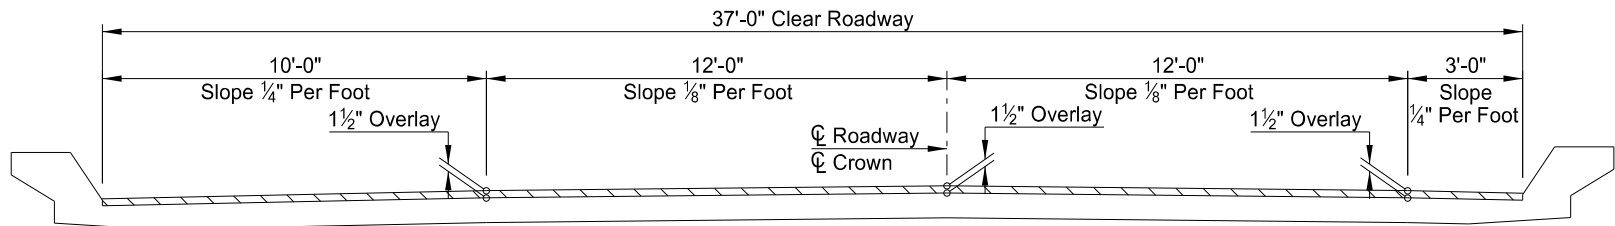

(SHOWING OVERLAY)
TYPICAL DECK SECTION

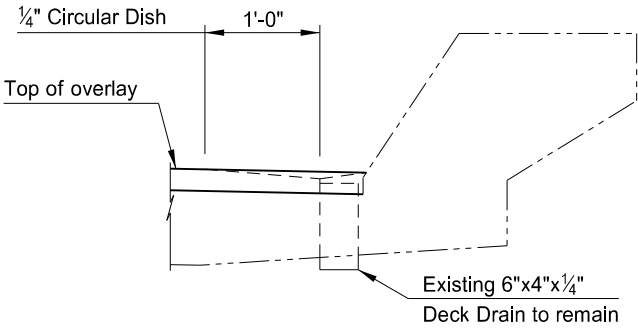

DECK DRAIN DETAIL

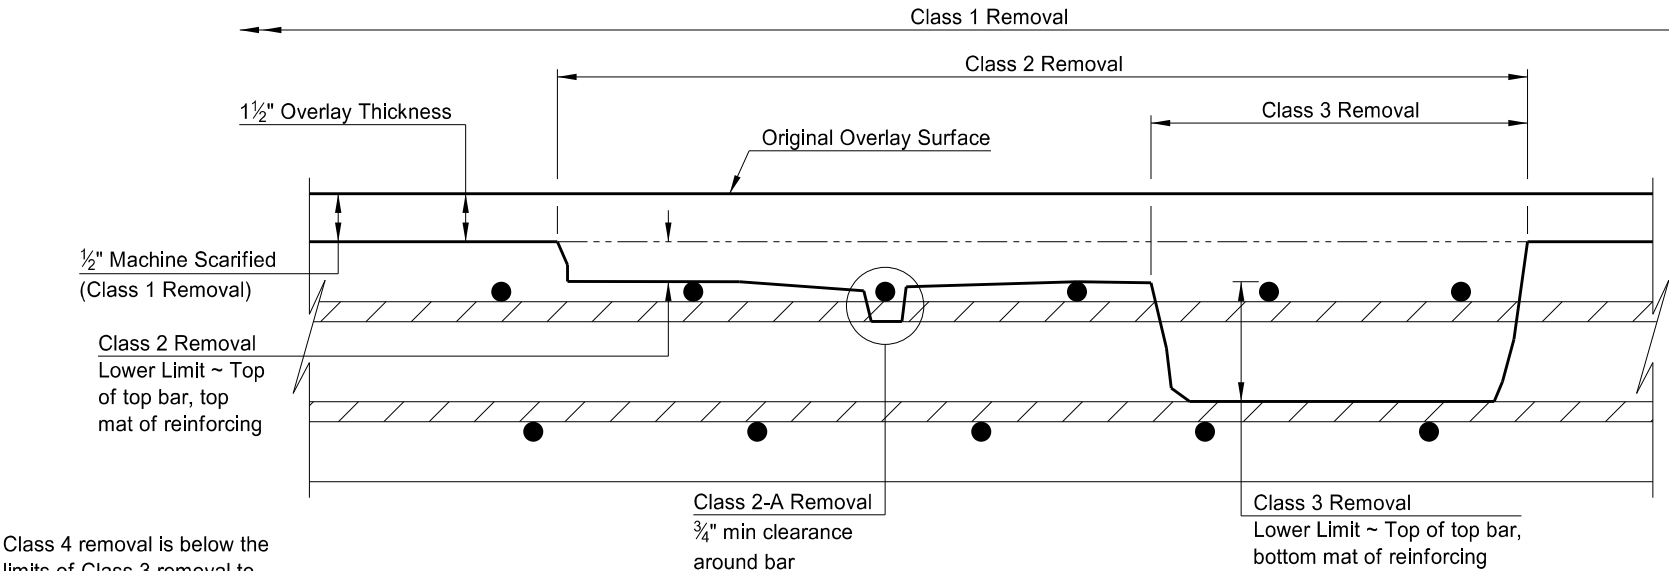

(OVERLAY CLASSIFICATIONS)
BRIDGE DECK SECTION

NOTE:

- 100 SCOPE OF WORK: Work at this site consists of a bridge deck overlay.
- Maintain one lane of traffic across the bridge at all times.
- 602 CONCRETE: Provide aggregate for concrete that meets the requirements of Section 802.01 C.2, "Coarse Aggregate" and Section 802.01 C.3, "Fine Aggregate."
- 650 CLASS 2-A REMOVAL: Class 2-A removal is paid for the top bar in the top mat of reinforcing only.
- 650 OVERLAY CONCRETE: Use size 5 coarse aggregate composed of crushed stone. Use crushed stone that has at least one fractured face on 75 percent of the particles retained on the number 4 sieve.

Place overlay concrete after September 15 requires authorization from by the Bridge Engineer.

QUANTITIES	
CLASS AAE-3 CONCRETE	2.04 CY
OVERLAY CONCRETE	60.8 CY
CLASS 1 REMOVAL	1048.3 SY
CLASS 2 REMOVAL	443.2 SY
CLASS 2-A REMOVAL	797.8 LF
CLASS 3 REMOVAL	52.4 SY
CLASS 4 REMOVAL	10.5 SY

This document was originally issued and sealed by Lindsay Bossert Registration Number PE 8395 on 02/09/2016 and the original document is stored at the North Dakota Department of Transportation

TURTLE RIVER


DECK OVERLAY DETAILS
(ALTERNATIVE A)

STATE	PROJECT NUMBER	SECTION NO.	SHEET NO.
ND	IM-6-029(132)153	170	6


NOTE:

- 602 CONCRETE: Provide aggregate for concrete that meets the requirements of Section 802.01 C.2, "Coarse Aggregate" and Section 802.01 C.3, "Fine Aggregate."
- 650 OVERLAY CONCRETE: Use size 5 coarse aggregate composed of crushed stone. Use crushed stone that has at least one fractured face on 75 percent of the particles retained on the number 4 sieve.


Place overlay concrete before September 15 unless authorized by the Bridge Engineer.
- 650 CLASS 2-H REMOVAL: The "Class 2-H Removal" shall only be paid on areas that receive a second pass from the hydrodemolition machine.
- 650 CLASS 3-H REMOVAL: The "Class 3-H Removal" shall only be paid on areas that receive a third pass from the hydrodemolition machine.

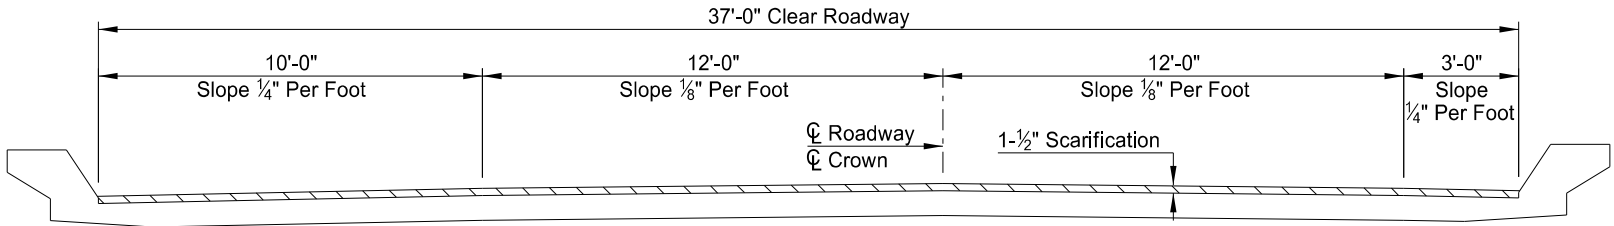

(SHOWING REMOVAL)
TYPICAL DECK SECTION

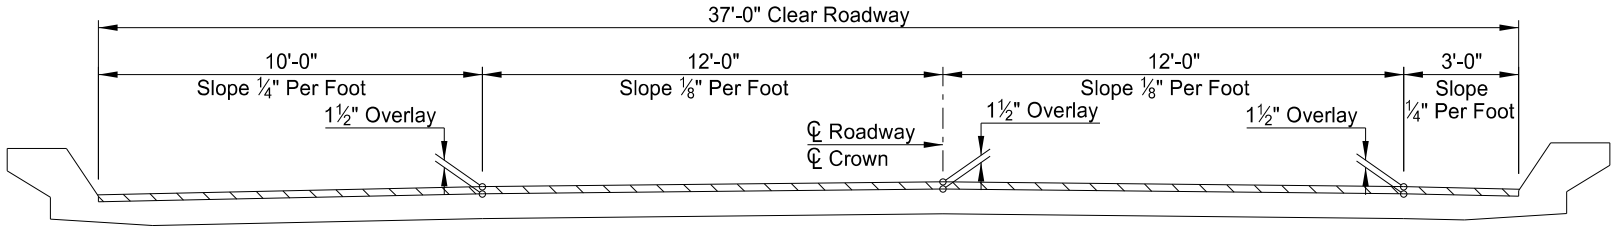

(SHOWING OVERLAY)
TYPICAL DECK SECTION

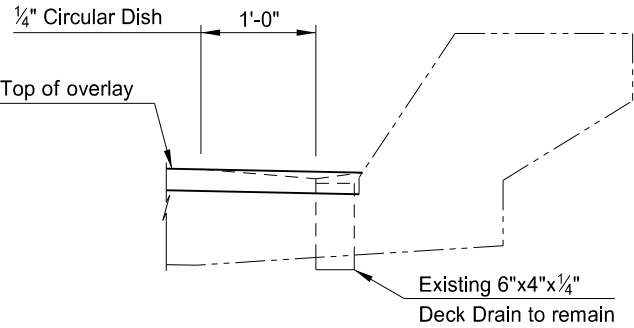

DECK DRAIN DETAIL

QUANTITIES	
CLASS AAE-3 CONCRETE	2.04 CY
OVERLAY CONCRETE	60.8 CY
CLASS 1-H REMOVAL	1048.3 SY
CLASS 2-H REMOVAL	443.2 SY
CLASS 3-H REMOVAL	62.9 SY

This document was originally issued and sealed by Lindsay Bossert, Registration Number PE 8395, on 02/09/2016. The original document is stored at the North Dakota Department of Transportation.

TURTLE RIVER

DECK OVERLAY DETAILS
(ALTERNATIVE B)

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.		
Abn	abandoned	BV	butterfly valve
Abut	abutment	Byp	bypass
Ac	acres	C Gdrl	cable guardrail
Adj	adjusted	Calc	calculate
Aggr	aggregate	Cd	candela
Ahd	ahead	CIP	cast iron pipe
ARV	air release valve	CB	catch basin
Align	alignment	CRS	cationic rapid setting
Al	alley	C Gd	cattle guard
Alt	alternate	C To C	center to center
Alum	aluminum	Cl or C	centerline
ADA	Americans with Disabilities Act	Cm	centimeter
A	ampere	Ch	chain
&	and	Chnlk	chain-link
Appr	approach	Ch Blk	channel block
Approx	approximate	Ch Ch	channel change
ACP	asbestos cement pipe	Chk	check
Asph	asphalt	Chsld	chiseled
AC	asphalt cement	Cir	circle
Assmd	assumed	Cl	class
@	at	Cl	clay
Atten	attenuation	Cl F	clay fill
ATR	automatic traffic recorder	Cl Hvy	clay heavy
Ave	Avenue	Cl Lm	clay loam
Avg	average	Clnt	clean-out
ADT	average daily traffic	Clr	clear
Az	azimuth	Cl&gr	clearing & grubbing
Bk	back	Co S	coal slack
BF	back face	Comb.	combination
Bs	backsight	Coml	commercial
Balc	balcony	Compr	compression
B Wire	barbed wire	CADD	computer aided drafting & design
Barr	barricade	Conc	concrete
Btry	battery	Cond	conductor
Brg	bearing	Const	construction
BI	beehive inlet	Cont	continuous
Beg	begin	CSB	continuous split barrel sample
BM	bench mark	Contr	contraction
Bkwy	bikeway	Contr	contractor
Bit	bituminous	CP	control point
Blk	block	Coord	coordinate
Bd Ft	board feet	Cor	corner
BH	bore hole	Corr	corrected
BS	both sides	CAES	corrugated aluminum end section
Bot	bottom	CAP	corrugated aluminum pipe
Blvd	Boulevard	CMES	corrugated metal end section
Bndry	boundary	CMP	corrugated metal pipe
BC	brass cap	CPVCP	corrugated poly-vinyl chloride pipe
Brkwy	breakaway	CSES	corrugated steel end section
Br	bridge	CSP	corrugated steel pipe
Bldg	building	CSP	corrugated steel pipe
		C	coulomb
		Co	County
		Crse	course
		C Gr	course gravel
		CS	course sand
		Ct	Court
		Xarm	cross arm
		Xbuck	cross buck
		Xsec	cross sections
		Xing	crossing
		Xrd	Crossroad
		Crn	crown
		CF	cubic feet
		M3	cubic meter
		M3/s	cubic meters per second
		CY	cubic yard
		Cy/mi	cubic yards per mile
		Culv	culvert
		C&G	curb & gutter
		CI	curb inlet
		CR	curb ramp
		CS	curve to spiral
		C	cut
		Dd Ld	dead load
		Defl	deflection
		Defm	deformed
		Deg or D	degree
		DInt	delineate
		DIntr	delineator
		Depr	depression
		Desc	description
		Det	detail
		DWP	detectable warning panel
		Dtr	detour
		Dia	diameter
		Dir	direction
		Dist	distance
		DM	disturbed material
		DB	ditch block
		DG	ditch grade
		Dbl	double
		Dn	down
		Dwg	drawing
		Dr	drive
		Drwy	driveway
		DI	drop inlet
		D	dry density
		Ea	each
		Esmt	easement
		E	East
		EB	Eastbound
		Elast	elastomeric
		EL	electric locker
		E Mtr	electric meter
		Elec	electric/al
		EDM	electronic distance meter
		Elev or El	elevation
		Ellipt	elliptical
		Emb	embankment
		Emuls	emulsion/emulsified
		ES	end section
		Engr	engineer
		ESS	environmental sensor station
		Eq	equal
		Eq	equation
		Evgr	evergreen
		Exc	excavation
		Exst	existing
		Exp	expansion
		Expy	Expressway
		E	external of curve
		Extru	extruded
		FOS	factor of safety
		F	Fahrenheit
		FS	far side
		F	farad
		Fed	Federal
		FP	feed point
		Ft	feet/foot
		Fn	fence
		Fn P	fence post
		FO	fiber optic
		FB	field book
		FD	field drive
		F	fill
		FAA	fine aggregate angularity
		FS	fine sand
		FH	fire hydrant
		FI	flange
		Flrd	flared
		FES	flared end section
		F Bcn	flashing beacon
		FA	flight auger sample
		FL	flow line
		Ftg	footing
		FM	force main
		Fs	foresight
		Fnd	found
		Fdn	foundation
		Frac	fractional
		Frwy	freeway
		Fr	front
		FF	front face
		F Disp	fuel dispenser

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-2

FFP	fuel filler pipes	IPn	Iron Pin	MC	medium curing	Ped	pedestal
FLS	fuel leak sensor	IP	Iron Pipe	M	mega	Ped	pedestrian
Furn	furnish/ed	Jt	joint	Mer	meridian	PPP	pedestrian pushbutton post
Gal	gallon	J	joule	M	meter	Pen.	penetration
Galv	galvanized	Jct	junction	M/s	meters per second	Perf	perforated
Gar	garage	K	kelvin	M	mid ordinate of curve	Per.	perimeter
Gs L	gas line	Kn	kilo newton	Mi	mile	PL	pipeline
G Reg	gas line regulator	Kpa	kilo pascal	MM	mile marker	PI	place
GMV	gas main valve	Kg	kilogram	MP	mile post	P&P	plan & profile
G Mtr	gas meter	Kg/m3	kilogram per cubic meter	MI	milliliter	PL	plastic limit
GSV	gas service valve	Km	kilometer	Mm	millimeter	PI	plate
GVP	gas vent pipe	K	Kip(s)	Mm/hr	millimeters per hour	Pt	point
GV	gate valve	LS	Land Surveyor (licensed)	Min	minimum	PCC	point of compound curve
Ga	gauge	LSIT	Land Surveyor In Training	Misc	miscellaneous	PC	point of curve
Geod	geodetic	Ln	lane	Mon	monument	PI	point of intersection
GIS	Geographical Information System	Lg	large	Mnd	mound	PRC	point of reverse curvature
G	giga	Lat	latitude	Mtbl	mountable	PT	point of tangent
GPS	Global Positioning System	Lt	left	Mtd	mounted	POC	point on curve
Gov	government	L	length of curve	Mtg	mounting	POT	point on tangent
Grd	graded/grade	Lens	lenses	Mk	muck	PE	polyethylene
Gr	gravel	Lvl	level	Mun	municipal	PVC	polyvinyl chloride
Grnd	ground	LB	level book	N	nano	PCC	Portland Cement concrete
GWM	ground water monitor	Lvlng	leveling	NGS	National Geodetic Survey	Lb or #	pounds
Gdrl	guardrail	Lht	light	NS	near side	PP	power pole
Gtr	gutter	LP	light pole	Neop	neoprene	Preempt	preemption
H Plg	H piling	Ltg	lighting	Ntwk	network	Prefab	prefabricated
Hdwl	headwall	Lig Co	lignite coal	N	newton	Prfmd	preformed
Ha	hectare	Lig Sl	lignite slack	N	North	Prep	preperation
Ht	height	LF	linear foot	NE	North East	Press.	pressure
HI	height of instrument	Liq	liquid	NW	North West	PRV	pressure relief valve
Hel	helical	LL	liquid limit	NB	Northbound	Prestr	prestressed
H	henry	L	litre	No. or #	number	Pvt	private
Hz	hertz	Lm	loam	Obsc	obscure(d)	PD	private drive
HDPE	high density polyethylene	Loc	location	Obsn	observation	Prod.	production/produce
HM	high mast	LC	long chord	Ocpd	occupied	Prog	programmed
HP	high pressure	Long.	longitude	Ocpy	occupy	Prop.	property
HPS	high pressure sodium	Lp	loop	Off Loc	office location	Prop Ln	property line
Hwy	highway	LD	loop detector	O/s	offset	Ppsd	proposed
Hor	horizontal	Lm	lumen	OC	on center	PB	pull box
HBP	hot bituminous pavement	Lum	luminaire	C	one dimensional consolidation		
HMA	hot mix asphalt	L Sum	lump sum	OC	organic content		
Hr	hour(s)	Lx	lux	Orig	original		
Hyd	hydrant	ML	main line	O To O	out to out		
Ph	hydrogen ion content	M Hr	man hour	OD	outside diameter		
Id	identification	MH	manhole	OH	overhead		
In or "	inch	Mkd	marked	PMT	pad mounted transformer		
Incl	inclinometer tube	Mkr	marker	Pg	pages		
IMH	inlet manhole	Mkg	marking	Pntd	painted		
ID	inside diameter	MA	mast arm	Pr	pair		
Inst	instrument	Matl	material	Pnl	panel		
Intchg	interchange	Max	maximum	Pk	park		
Intmdt	intermediate	MC	meander corner	PK	Parker-Kalon nail		
Intscn	intersection	Meas	measure	Pa	pascal		
Inv	invert	Mdn	median	PSD	passing sight distance		
IM	iron monument	MD	median drain	Pvmt	pavement		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-3

Qty	quantity	SN	sign number	Tan	tangent	Wb	weber
Qtr	quarter	Sig	signal	T	tangent (semi)	WIM	weigh in motion
Rad or R	radius	Si Cl	silt clay	TS	tangent to spiral	W	west
RR	railroad	Si Cl Lm	silty clay loam	Tel	telephone	WB	westbound
Rlwy	railway	Si Lm	silty loam	Tel B	Telephone Booth	Wrng	wiring
Rsd	raised	Sgl	single	Tel P	telephone pole	W/	with
RTP	random traverse point	SC	slow curing	Tv	television	W/o	without
Rge or R	range	SS	slow setting	Temp	temperature	WC	witness corner
RC	rapid curing	Sm	small	Temp	temporary	WGS	world geodetic system
Rec	record	S	South	TBM	temporary bench mark	Z	zenith
Rcy	recycle	SE	South East	T	tesla		
RAP	recycled asphalt pavement	SW	South West	T	thinwall tube sample		
RPCC	recycled portland cement concrete	SB	Southbound	T/mi	tons per mile		
Ref	reference	Sp	spaces	Ts	topsoil		
R Mkr	reference marker	Spcl	special	Tw or T	township		
RM	reference monument	SA	special assembly	Traf	traffic		
Refl	reflectorized	SP	special provisions	TSCB	traffic signal control box		
RCB	reinforced concrete box	G	specific gravity	Tr	trail		
RCES	reinforced concrete end section	Spk	spike	Transf	transformer		
RCP	reinforced concrete pipe	SC	spiral to curve	TB	transit book		
RCPS	reinforced concrete pipe sewer	ST	spiral to tangent	Trans	transition		
Reinf	reinforcement	SB	split barrel sample	TT	transmission tower		
Res	reservation	SH	sprinkler head	Trans	transverse		
Ret	retaining	SV	sprinkler valve	Trav	traverse		
Rev	reverse	Sq	square	TP	traverse point		
Rt	right	SF	square feet	Trtd	treated		
R/W	right of way	Km2	square kilometer	Trmt	treatment		
Riv	river	M2	square meter	Qc	triaxial compression		
Rd	road	SY	square yard	TERO	tribal employment rights ordinance		
Rdbd	road bed	Stk	stake	Tpl	triple		
Rdwy	roadway	Std	standard	TP	turning point		
RWIS	roadway weather information system	N	standard penetration test	Typ	typical		
Rk	rock	Std Specs	standard specifications	Qu	unconfined compressive strength		
Rt	route	Sta	station	Ugrnd	underground		
Salv	salvage(d)	Sta Yd	station yards	USC&G	US Coast & Geodetic Survey		
Sd	sand	Stm L	steam line	USGS	US Geologic Survey		
Sdy Cl	sandy clay	SEC	steel encased concrete	Util	utility		
Sdy Cl Lm	sandy clay loam	SMA	stone matrix asphalt	VG	valley gutter		
Sdy Fl	sandy fill	SSD	stopping sight distance	Vap	vapor		
Sdy Lm	sandy loam	SD	storm drain	Vert	vertical		
San	sanitary sewer line	St	street	VC	vertical curve		
Sc	scoria	SPP	structural plate pipe	VCP	vitrified clay pipe		
Sec	seconds	SPPA	structural plate pipe arch	V	volt		
Sec	section	Str	structure	Vol	volume		
SL	section line	Subd	subdivision	Wkwy	walkway		
Sep	separation	Sub	subgrade	W	water content		
Seq	sequence	Sub Prep	subgrade preperation	WGV	water gate valve		
Serv	service	Ss	subsoil	WL	water line		
Sh	shale	SE	superelevation	WM	water main		
Sht	sheet	SS	supplement specification	WMV	water main valve		
Shtng	sheeting	Supp	supplemental	W Mtr	water meter		
Shldr	shoulder	Surf	surfacing	WSV	water service valve		
Sw	sidewalk	Surv	survey	WW	water well		
S	siemens	Sym	symmetrical	W	watt		
SD	sight distance	SI	systems international	Wrng	wearing		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM	702 Communications	GT PLNS NAT GAS	Great Plains Natural Gas Company	RED RIV TEL	Red River Rural Telephone
ACCENT	Accent Communications	HALS TEL	Halstad Telephone Company	RESVTN TEL	Reservation Telephone
AGASSIZ WU	Agassiz Water Users Incorporated	IDEA1	Idea1	ROBRTS TEL	Roberts Company Telephone
AGC	Associated General Contractors of America	INT-COMM TEL	Inter-Community Telephone Company	R-RIDER ELEC	Roughrider Electric Coop
AI PI	Alliance Pipeline	KANEB PL	Kaneb Pipeline Company	RRVW	Red River Valley & Western Railroad
ALL SEAS WU	All Seasons Water Users Association	KEM ELEC	Kem Electric Cooperative Incorporated	RSR ELEC	R.S.R. Electric Cooperative
AMOCO PI	Amoco Pipeline Company	KOCH GATH SYS	Koch Gathering Systems Incorporated	S E W U	South East Water Users Incorporated
AMRDA HESS	Amerada Hess Corporation	LKHD PL	Lakehead Pipeline Company	SCOTT CABLE	Scott Cable Television Dickinson
AT&T	AT&T Corporation	LNGDN RWU	Langdon Rural Water Users Incorporated	SHERDN ELEC	Sheridan Electric Cooperative
B PAW	Bear Paw Energy Incorporated	LWR YELL R ELEC	Lower Yellowstone Rural Electric	SHEYN VLY ELEC	Sheyenne Valley Electric Cooperative
BAKER ELEC	Baker Electric	MCKNZ CON	McKenzie Consolidated Telcom	SKYTECH	Skyland Technologies Incorporated
BASIN ELEC	Basin Electric Cooperative Incorporated	MCKNZ ELEC	McKenzie Electric Cooperative	SLOPE ELEC	Slope Electric Cooperative Incorporated
BEK TEL	Bek Communications Cooperative	MCKNZ WRD	McKenzie County Water Resource District	SOURIS RIV TELCOM	Souris River Telecommunications
BELLE PL	Belle Fourche Pipeline Company	MCLEOD	McLeod USA	ST WAT COMM	State Water Commission
BLM	Bureau of Land Management	MCLN ELEC	McLean Electric Cooperative	STATE LN WATER	State Line Water Cooperative
BNSF	Burlington Northern Santa Fe Railway	MCLN-SHRDN R WAT	McLean-Sheridan Rural Water	STER ENG	Sterling Energy
BOEING	Boeing	MDU	Montana-dakota Utilities	STUT RWU	Stutsman Rural Water Users
BRNS RWD	Barnes Rural Water District	MID-CONT CABLE	Mid-Continent Cable	SW PL PRJ	Southwest Pipeline Project
BURK-DIV ELEC	Burke-Divide Electric Cooperative	MIDSTATE TEL	Midstate Telephone Company	T M C	Turtle Mountain Communications
BURL WU	Burleigh Water Users	MINOT CABLE	Minot Cable Television	TCI	TCI of North Dakota
Cable One	Cable One	MINOT TEL	Minot Telephone Company	TESORO HGH PLNS PL	Tesoro High Plains Pipeline
CABLE SERV	Cable Services	MISS W W S	Missouri West Water System	TRI-CNTY WU	Tri-County Water Users Incorporated
CAP ELEC	Capital Electric Cooperative Incorporat	MNKOTA PWR	Minnkota Power	TRL CO RWU	Traill County Rural Water Users
CASS CO ELEC	Cass County Electric Cooperative	MOR-GRAN-SOU ELEC	Mor-gran-sou Electric Cooperative	UNTD TEL	United Telephone
CASS RWU	Cass Rural Water Users Incorporated	MOUNT-WILLI ELEC	Mountrail-williams Electric Cooperative	UPPR SOUR WUA	Upper Souris Water Users Association
CAV ELEC	Cavalier Rural Electric Cooperative	MRE LBTY TEL	Moore & Liberty Telephone	US SPRINT	U.S. Sprint
CBLCOM	Cablecom Of Fargo	MUNICIPAL	City Water And Sewer	USAF MSL CABLE	U.S.A.F. Missile Cable
CENEX PL	Cenex Pipeline	MUNICIPAL	City Of '.....'	USFWS	US Fish and Wildlife Service
CENT PL WATER DIST	Central Pipe Line Water District	N CENT ELEC	North Central Electric Cooperative	USW COMM	U.S. West Communications
CENT PWR ELEC	Central Power Electric Cooperative	N VALL W DIST	North Valley Water District	VRNDRY ELEC	Verendrye Electric Cooperative
COE	Corps of Engineers	ND PKS & REC	North Dakota Parks And Recreation	W RIV TEL	West River Telephone Incorporated
CONS TEL	Consolidated Telephone	ND TEL	North Dakota Telephone Company	WEB	W. E. B. Water Development Association
CONT RES	Continental Resource Inc	NDDOT	North Dakota Department of Transportation	WILLI RWA	Williams Rural Water Association
CPR	Canadian Pacific Railway	NDSU SOIL SCI DEPT	NDSU Soil Science Department	WILSTN BAS PL	Williston Basin Interstate Pipeline Company
D O E	Department Of Energy	NEMONT TEL	Nemont Telephone	WLSH RWD	Walsh Water Rural Water District
DAK CARR	Dakota Carrier Network	NODAK R ELEC	Nodak Rural Electric Cooperative	WOLVRTN TEL	Wolverton Telephone
DAK CENT TEL	Dakota Central Telephone	NOON FRMS TEL	Noonan Farmers Telephone Company	XLENER	Xcel Energy
DAK RWD	Dakota Rural Water District	NPR	Northern Plains Railroad	YSVR	Yellowstone Valley Railroad
DGC	Dakota Gasification Company	NSP	Northern States Power		
DICKEY R NET	Dickey Rural Networks	NTH PRAIR RW	Northern Prairie Rural Water Association		
DICKEY RWU	Dickey Rural Water Users Association	NTHN BRDR PL	Northern Border Pipeline		
DICKEY TEL	Dickey Telephone	NTHN PLNS ELEC	Northern Plains Electric Cooperative Incorporated		
DNRR	Dakota Northern Railroad	NTHWSTRN REF	Northwestern Refinery Company		
DO ME PL	Dome Pipeline Company	NW COMM	Northwest Communication Cooperation		
DVELEC	Dakota Valley Electric Cooperative	ONEOK	Oneok gas		
DVMW	Dakota, Missouri Valley & Western	OSHA	Occupational Safety and Health Administration		
ENBRDG	Enbridge Pipelines Incorporated	OTTR TL PWR	Otter Tail Power Company		
ENVENTIS	Enventis Telephone	P L E M	Prairielands Energy Marketing		
FALK MNG	Falkirk Mining Company	POLAR COM	Polar Communications		
FHWA	Federal Highway Administration	PVT ELEC	Private Electric		
G FKS-TRL WD	Grand Forks-trail Water District	QWEST	Qwest Communications		
GETTY TRD & TRAN	Getty Trading & Transportation	R&T W SUPPLY	R & T Water Supply Association		
GLDN W ELEC	Golden West Electric Cooperative	RAMSEY R SEW	Ramsey Rural Sewer Association		
GRGS CO TEL	Griggs County Telephone	RAMSEY RW	Ramsey Rural Water Association		
		RAMSEY UTIL	Ramsey County Rural Utilities		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
























































This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Line Styles

	Limits of Const Transition Line		Floating Silt Curtain		Existing Aggregate (Cross Section View)		Existing Centerline
	Bale Check		Existing Telephone Line		Existing Curb and Gutter (Cross Section View)		Supplemental Contour
	Rock Check		Existing TV Line		Existing Riprap		Right of Way
	Sight Distance Triangle Line		Existing Assumed Ground (Not Surveyed)		Existing Underground Vault or Lift Station		Existing Right of Way
	Small Hidden Object		Tentative Ground Line		Tangent Line		Existing Right of Way Railroad
	Dimension Leader		Existing Water or Steam Line		Hidden Object		Failure Line
	Existing Ground		Existing Under Drain		Existing Dirt Surface		Existing Conditions
	Existing Topsoil (Cross Section View)		Under Drain		Existing Conduit		Existing Ground (Details)
	Large Hidden Object		Wall		Topsoil Profile		Existing Sixteenth Section Line
	Edge Drain		Existing Slotted Drain		Existing Conductor		Existing Right of Way Not State Owned
	Geotextile Fabric Type D		Existing Cemetary Boundary		Conductor		Phantom Object
	Existing Electrical		Centerline Pavement Marking		Fiber Optic		Centerline Main
	Existing Fiber Optic Line		Barrier with Centerline Pavement Marking		Existing Loop Detector		Existing Guardrail Cable
	Existing TV Fiber Optic		Barrier Pavement Marking		Subgrade, Subcut or Ditch Grade		Existing Guardrail Metal
	Existing Gas Pipe		Stripe 4 IN Dotted Extension White		Existing Asphalt Surface		Existing Edge of Water
	Geogrid		Stripe 8 IN Dotted Extension White		Existing Asphalt (Cross Section View)		Excavation Limits
	Existing Overhead Utility Line		Stripe 8 IN Lane Drop		Existing Reinforcement Rebar		Existing Government Lot Line
	Existing Power		Wetland Mitigation		Existing Tie Point Line		Existing Adjacent Block Lines
	Existing Fuel Pipeline		Existing Box Culvert Bridge		Existing State or International Line		Existing Adjacent Lot Lines
	Existing Undefined Above Ground Pipe Line		Existing Concrete Surface		Existing Quarter Section Line		Existing Adjacent Property Line
	Geotextile Fabric Type R		Existing Drainage Structure		Existing County		Existing Adjacent Subdivision Lines
	Geotextile Fabric Type R1		Easement		Existing Section Line		
	Remove Line		Existing Concrete		Existing Township		
	Geotextile Fabric Type RR		Existing Easement		Existing Railroad Centerline		
	Geotextile Fabric Type S		Existing Gravel Surface		Centerline		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		<p>This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation</p>
07-01-14		
REVISIONS		
DATE	CHANGE	

Line Styles

	Subgrade Reinforcement		Existing Railroad Switch		Sheet Piling
	Existing Down Guy Wire Down Guy		Overhead Sign Structure Cantilever		W-Beam w Posts
	Existing Fence		24 Inch Pipe		Existing W-Beam Guardrail with Posts
	Existing Railroad		Reinforced Concrete Pipe		Exst Wet Area-Vegetation Break
	Existing Sanitary Sewer		Signal Head with Mast Arm		Existing Wetland Delineated
	Existing Sanitary Force Main		Existing Signal Head with Mast Arm		
	Existing Storm Drain		Tie Bar at Random Spacing		
	Existing Storm Drain Force Main		3-Cable w Posts		
	Fence		Existing 3-Cable w Posts		
	Silt Fence		Site Boundary		
	Existing Field Line		Fiber Rolls		
	Exst Flow		Doweled Joint		
	Flow		Tie Bar 30 Inch 4 Foot Center to Center		
	Existing Culvert		Tie Bar 18 Inch 3 Foot Center to Center		
	Existing Curb		Existing Berm, Dike, Pit, or Earth Dam		
	Existing Valley Gutter		Existing Ditch Block		
	Existing Driveway Gutter		Depression Contours		
	Existing Curb and Gutter		Existing City Corporate Limits or Reservation Boundary		
	Existing Mountable Curb and Gutter		Gravel Pit - Borrow Area		
	Existing Double Micro Loop Detector		Existing Tree Boundary		
	Micro Loop Detector Double		Tree Row		
	Existing Overhead Sign Structure		Existing Brush or Shrub Boundary		
	Existing Micro Loop Detector		Existing Retaining Wall		
	Micro Loop Detector		Existing Planter or Wall		
	Existing Overhead Sign Structure Cantilever		Retaining Wall (Plan View)		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation
07-01-14		
REVISIONS		
DATE	CHANGE	




























































































Symbols

	North Arrow (Half Scale)		Attenuation Device		Existing Railroad Battery Box		Existing Delineator Type E
	Truck Mounted Attenuator		Diamond Grade Delineator Type A		Existing Bush or Shrub		Existing EFB Misc
	Type I Barricade		Diamond Grade Delineator Type B		Existing Gas Cap or Stub		Existing Flashing Beacon
	Type II Barricade		Diamond Grade Delineator Type C		Existing Sanitary Cap or Stub		Existing Pipe Mounted Flasher
	Type III Barricade		Diamond Grade Delineator Type D		Existing Storm Drain Cap or Stub		Existing Pad Mounted Feed Point
	Catch Basin		Diamond Grade Delineator Type E		Existing Water Cap or Stub		Existing Pipe Mounted Feed Point with Pad
	Caim or Stone Circle		Flexible Delineator		Existing Sanitary Cleanout		Existing Pole Mounted Feed Point
	Video Detection Camera		Flexible Delineator Type A		Existing Concrete Foundation		Existing Railroad Frog
	Storm Drain Cap or Stub		Flexible Delineator Type B		Existing Traffic Signal Controller		Existing Snow Gate 18
	Corrugated Metal End Section 18 Inch		Flexible Delineator Type C		Existing Pad Mounted Signal Controller		Existing Snow Gate 28
	Corrugated Metal End Section 24 Inch		Flexible Delineator Type D		Existing Sixteenth Section Corner		Existing Snow Gate 40
	Corrugated Metal End Section 30 Inch		Flexible Delineator Type E		Existing Quarter Section Corner		Existing Headwall
	Corrugated Metal End Section 36 Inch		Delineator Type A		Existing Section Corner		Existing Pedestrian Head with Number
	Corrugated Metal End Section 42 Inch		Delineator Type A Reset		Existing Railroad Crossbuck		Existing Signal Head
	Corrugated Metal End Section 48 Inch		Delineator Type B		Existing Satellite Dish		Existing Sprinkler Head
	Concrete Foundation		Delineator Type B Reset		Existing Fuel Dispensers		Existing Fire Hydrant
	Ground Connection Conductor		Delineator Type C		Existing Flexible Delineator Type A		Existing Catch Basin Drop Inlet
	Neutral Connection Conductor		Delineator Type D		Existing Flexible Delineator Type B		Existing Curb Inlet
	Phase 1 Connection Conductor		Delineator Type E		Existing Flexible Delineator Type C		Existing Manhole Inlet
	Phase 2 Connection Conductor		Delineator Drums		Existing Flexible Delineator Type D		Existing Junction Box
	Traffic Cone		Spot Elevation		Existing Flexible Delineator Type E		
	Signal Controller		Existing Access Control Arrow		Existing Delineator Type A		
	Pad Mounted Signal Controller		Existing Artifact		Existing Delineator Type B		
	Alignment Data Point		Existing Flashing Beacon		Existing Delineator Type C		
	Emergency Vehicle Detector		Existing Benchmark		Existing Delineator Type D		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation
07-01-14		
REVISIONS		
DATE	CHANGE	

Symbols

D-101-31

	Existing Light Standard		Existing Manhole with Valve Water		Existing Telephone Pole		Existing Undefined Manhole
	Existing High Mast Light Standard 10 Luminaire		Existing Water Manhole		Existing Wood Pole		Existing Undefined Pull Box
	Existing High Mast Light Standard 3 Luminaire		Existing Mile Post Type A		Existing Post		Existing Undefined Pedestal
	Existing High Mast Light Standard 4 Luminaire		Existing Mile Post Type B		Existing Pedestrian Push Button Post		Existing Undefined Valve
	Existing High Mast Light Standard 5 Luminaire		Existing Mile Post Type C		Existing Control Point CP		Existing Undefined Pipe Vent
	Existing High Mast Light Standard 6 Luminaire		Existing Reference Marker		Existing Control Point GPS-RTK		Existing Gas Valve
	Existing High Mast Light Standard 7 Luminaire		Existing RW Marker		Existing Control Point TRI		Existing Water Valve
	Existing High Mast Light Standard 8 Luminaire		Existing Utility Marker		Existing Reference Marker Point NGS		Existing Fuel Pipe Vent
	Existing High Mast Light Standard 9 Luminaire		Iron Monument Found		Existing Pull Box		Existing Gas Pipe Vent
	Existing Overhead Sign Structure Load Center		Iron Pin R/W Monument		Existing Intelligent Transportation Pull Box		Existing Sanitary Pipe Vent
	Existing Luminaire		Existing Object Marker Type I		Existing Water Pump		Existing Storm Drain Pipe Vent
	Existing Light Standard Luminaire		Existing Object Marker Type II		Existing Slotted Reinforced Concrete Pipe		Existing Water Pipe Vent
	Existing Federal Mailbox		Existing Object Marker Type III		Existing RR Profile Spot		Existing Weather Station
	Existing Private Mailbox		Existing Electrical Pedestal		Existing Fuel Leak Sensors		Existing Ground Water Well Bore Hole
	Existing Meander Section Corner		Existing Telephone Pedestal		Existing Highway Sign		Existing Windmill or Tower
	Existing Meter		Existing Fiber Optic Telephone Pedestal		Existing Miscellaneous Spot		Existing Witness Corner
	Existing Electrical Manhole		Existing TV Pedestal		Existing Lighting Standard Pole		Flashing Beacon
	Existing Gas Manhole		Existing Fiber Optic TV Pedestal		Existing Traffic Signal Standard		Flagger
	Existing Sanitary Manhole		Existing Fuel Filler Pipes		Existing Transformer		Pipe Mounted Flasher
	Existing Sanitary Force Main Manhole		Existing Traverse PI Aerial Panel		Existing Large Evergreen Tree		Sanitary Force Main with Valve
	Existing Sanitary Manhole with Valve		Existing Pole		Existing Small Evergreen Tree		
	Existing Storm Drain Manhole		Existing Power Pole		Existing Large Tree		
	Existing Force Main Storm Drain Manhole		Existing Power Pole with Transformer		Existing Small Tree		
	Existing Force Main Storm Drain Manhole with Valve				Existing Tree Trunk		
	Existing Telephone Manhole				Existing Pad Mounted Traffic Signal Control Box		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols



Pad Mounted Feed Point



Pipe Mounted Feed Point with Pad



Pole Mounted Feed Point



Headwall



Double Headwall with Vegetation Barrier



Single Headwall with Vegetation Barrier



Pole Mounted Head



Sprinkler Head



Fire Hydrant



Inlet Type 1



Inlet Type 2



Double Inlet Type 2



Inlet Grate Type 2



Junction Box



High Mast Light Standard 10 Luminaire



High Mast Light Standard 3 Luminaire



High Mast Light Standard 4 Luminaire



High Mast Light Standard 5 Luminaire



High Mast Light Standard 6 Luminaire



High Mast Light Standard 7 Luminaire



High Mast Light Standard 8 Luminaire



High Mast Light Standard 9 Luminaire



Relocate Light Standard



Overhead Sign Structure Load Center



Light Standard 100 Watt High Pressure Sodium Vapor Luminaire



Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire



Light Standard 150 Watt High Pressure Sodium Vapor Luminaire



Light Standard 175 Watt High Pressure Sodium Vapor Luminaire



Light Standard 200 Watt High Pressure Sodium Vapor Luminaire



Light Standard 250 Watt High Pressure Sodium Vapor Luminaire



Light Standard 310 Watt High Pressure Sodium Vapor Luminaire



Light Standard 35 Watt High Pressure Sodium Vapor Luminaire



Light Standard 400 Watt High Pressure Sodium Vapor Luminaire



Light Standard 50 Watt High Pressure Sodium Vapor Luminaire



Light Standard 70 Watt High Pressure Sodium Vapor Luminaire



Light Standard 700 Watt High Pressure Sodium Vapor Luminaire



Manhole



Manhole 48 Inch



Sanitary Force Main Manhole



Sanitary Sewer Manhole



Storm Drain Manhole



Storm Drain Manhole with Inlet



Reset Mile Post



Mile Post Type A



Mile Post Type B



Mile Post Type C



Right of Way Marker



Tubular Marker



Alignment Monument



Iron Pin Reference Monument



Object Marker Type I



Object Marker Type II



Object Marker Type III



Caution Mode Arrow Panel



Back to Back Vertical Panel Sign



Double Direction Arrow Panel



Left Directional Arrow Panel



Right Directional Arrow Panel



Sequencing Arrow Panel



Truck Mounted Arrow Panel



Power Pole



Wood Pole



Pedestrian Push Button Post



Property Corner



Pull Box



Intelligent Transportation Pull Box



Sanitary Pump



Storm Drain Pump



Reinforced Pavement



Reinforced Concrete End Section 15 Inch



Reinforced Concrete End Section 18 Inch



Reinforced Concrete End Section 24 Inch



Reinforced Concrete End Section 30 Inch



Reinforced Concrete End Section 36 Inch



Reinforced Concrete End Section 42 Inch



Reinforced Concrete End Section 48 Inch



Reinforced Concrete End Section 54 Inch



Reset Right of Way Marker



Reset USGS Marker



Right of Way Markers



Riser 30 Inch



Continuous Split Barrel Sample



Flight Auger Sample



Split Barrel Sample



Thinwall Tube Sample



Highway Sign



SNOW GATE 18 FT



SNOW GATE 28 FT



SNOW GATE 40 FT



Standard Penetration Test



Transformer



Inclinometer Tube



Underdrain Cleanout



Excavation Unit





Water Valve

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 07/01/14 and the original document is stored at the
North Dakota Department
of Transportation

ATTENUATION DEVICE


D-704-1

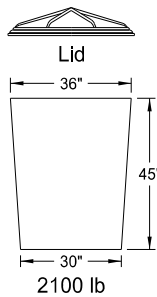

Outer Containers




Cones



Typical Assembly

Typical Module Construction Detail

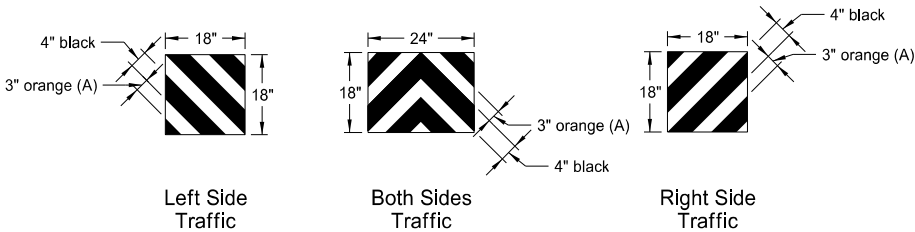


Reflective Sheet Detail

Note:
The last attenuation device facing traffic shall have a reflective sheet, following the details above, directly applied to the outer container. The sheet may also be applied to a metallic sheet and attached to the container with approved fasteners. The reflective sheeting shall be Type IV as specified in NDDOT Standard Specifications.


(A) 3" orange sheeting shall be used for temporary installations, and 3" yellow sheeting shall be used for permanent installations.

Fill Chart					
Distance from top edge	Module Weights (LBS)				
	200	400	700	1400	2100
	8½"	5"	4"	3"	0"

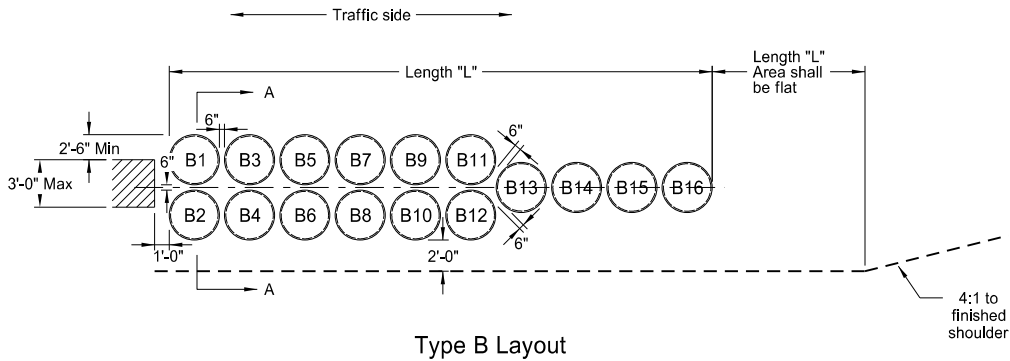

Type B Layout

Note:
When attenuation devices are placed at piers offset from roadway, they shall be angled 10 degrees towards traffic.

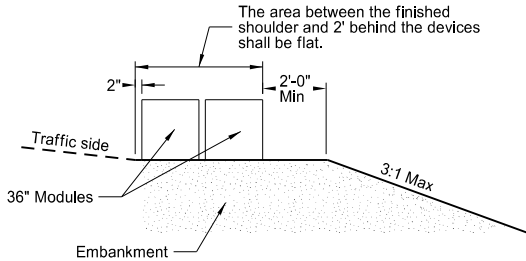

Section A-A
(Type B Layout)

Type B Attenuation Device											
Module Number	Dash Number										
	75	70	65	60	55	50	45	40	35	30	25
	Module Weights (LBS)										
B1	2100										
B2	2100										
B3	2100	2100	2100	2100	2100	2100	2100	2100	2100		
B4	2100	2100	2100	2100	2100	2100	2100	2100	2100		
B5	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B6	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B7	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B8	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B9	700	700	700	700	700	700	700	700	700	700	700
B10	700	700	700	700	700	700	700	700	700	700	700
B11	700	700	700	700	700	700	700	700	700	700	700
B12	700	700	700	700	700	700	700	700	700	700	700
B13	700	700	700	700	700	700	700	700	700	700	700
B14	400	400	400	400	400	400	400	400	400	400	400
B15	400	400	400	400	400	400	400	400	400	400	400
B16	200	200	200	200	200	200	200	200	200	200	200
Length (L)	34.2'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	27.2'	27.2'
Module Weights (LBS)	Replacement Module										
2100	1	1	1	1	1	1	1	1	1		
1400	1	1	1	1	1	1	1	1	1	1	1
700	2	2	2	2	2	2	2	2	2	2	2
400	1	1	1	1	1	1	1	1	1	1	1
200	2	2	2	1	1	1	1	1	1	1	1

Notes:

- Materials
 - Modules shall be manufactured from a frangible polyethylene material which will shatter upon impact.
 - Modules shall be filled with class 43 aggregate meeting the requirements for aggregate according to NDDOT Standard Specifications. The fill unit weight shall be at least 100 pounds per cubic foot. Fill left over winter shall have a moisture content of 2% or less.
- Modules
 - The modules shall be provided in two sizes to contain volumes of either 2, 4, 7, 14, or 21 cubic feet as a minimum.
 - The module for the 2, 4 or 7 cubic foot container shall consist of three components:
 - A 14 C.F., yellow outer container.
 - A black lid which locks securely over the top lip of the container.
 - A cone-shaped supporting insert. The insert shall be varied to allow for the three sizes of modules and capable of supporting 200, 400, or 700 pounds of sand mass. The cone inserts shall be placed inside the 14 cubic foot container.
 - The module for the 21 cubic foot container shall consist of two components:
 - A 36" height X 36" width yellow outer container.
 - A black lid which locks securely over the top of the container.
- For temporary use: The modules shall be Energite or Fitch attenuation barrels manufactured by Energy Absorption Systems of Chicago, IL, TrafFix barrels manufactured by TrafFix Devices, Inc. of San Clemente, CA, or an approved equal. The attenuation devices may be placed on pallets to facilitate maintenance. Pallets shall have a maximum thickness of 3½".
- For permanent use: Barrel Attenuation Device installations, the outer sand container portion of the modules shall consist of a one-piece container with separate detachable lid. The modules which meet these requirements are Energite attenuation barrels manufactured by Energy Absorption Systems of Chicago, IL, TrafFix barrels manufactured by TrafFix Devices, Inc. of San Clemente, CA, or an approved equal. Modules having outer sand containers assembled from multiple pieces shall not be accepted for permanent installations.
- The Typical Module Construction Detail and Type B Layout are based on the Energite Crash Cushion manufactured by Energy Absorption. The manufacturer of other sand filled attenuation modules shall provide any necessary layouts and details required which differ from those shown here.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE
7-18-14	Revised sheeting in reflective sheet detail

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 7/18/14 and the original document is stored at the
North Dakota Department
of Transportation

CONSTRUCTION SIGN DETAIL

D-704-5


[illegible]

Notes:


1. Sign shall be placed a distance of $\frac{1}{2}$ A following the End Road Work (G20-2a-48) sign. There shall be a maximum of 2 signs per project.
2. Sign shall be post mounted.
3. Sign required on rural projects with a 30 day or longer duration and it is not required on seal coat projects or other short duration projects.
4. Sign shall not be placed in urban areas or within city limits.

Advance Warning Sign Spacing (A)			
Road Type	Distance between signs min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		This document was originally issued and sealed by Roger Weigel Registration Number PE- 2930 , on 7/18/14 and the original document is stored at the North Dakota Department of Transportation
8-22-12		
REVISIONS		
DATE	CHANGE	
7-18-14	Revise sheeting to type IV	

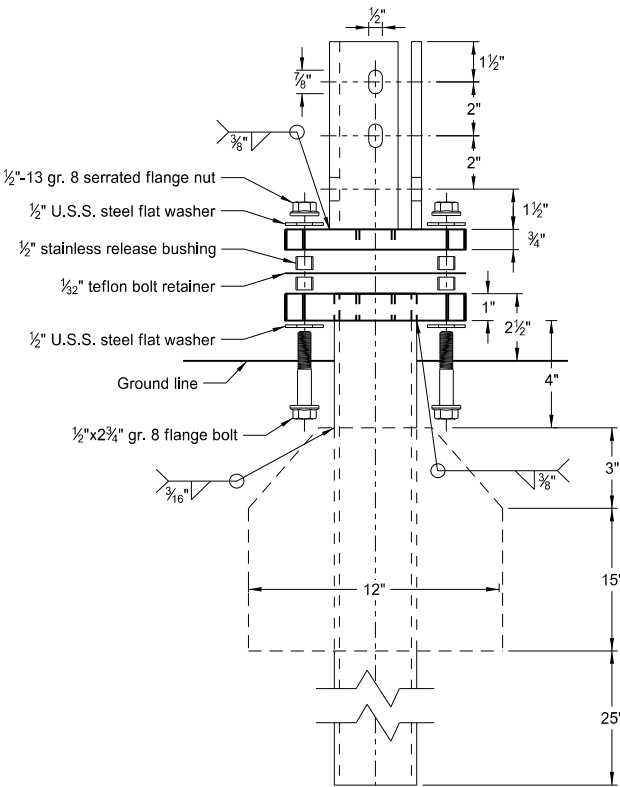


Multi-Directional Slip Base Assembly

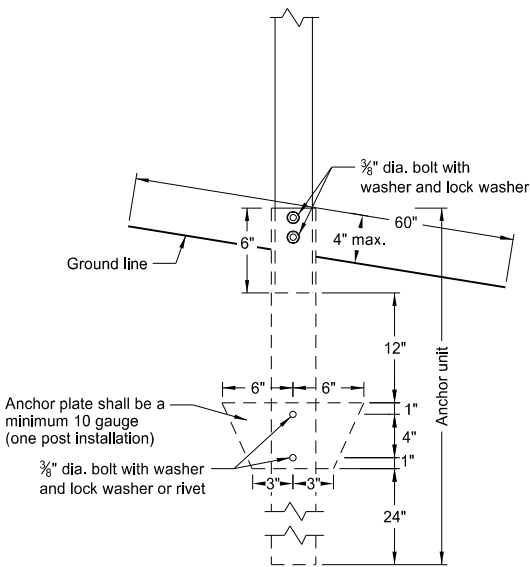

Anchor Unit and Post Assembly

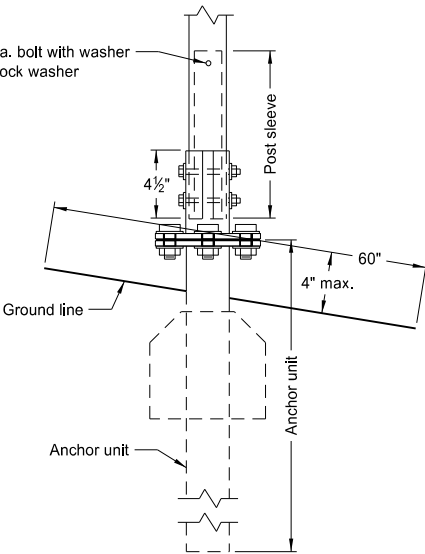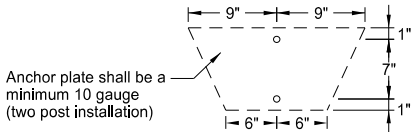


Multi-Directional Slip Base Anchor Unit and Post Sleeve Assembly

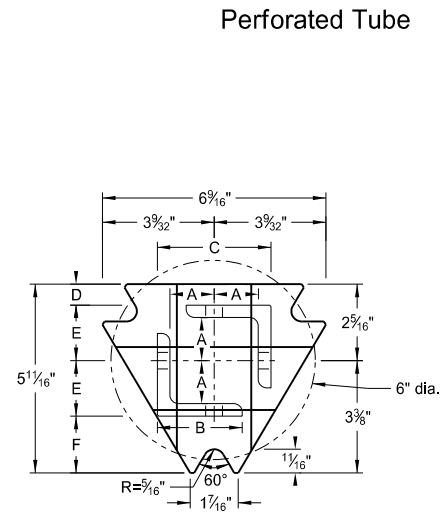


Top Post Receiver

Plate - ASTM A572 grade 50
Angle Receiver - 2 1/2"x2 1/2"x3/8" ASTM A36 structural angle

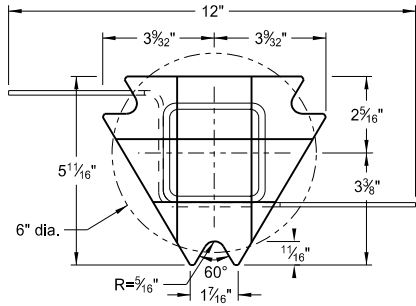

Bottom Soil Stub

Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50

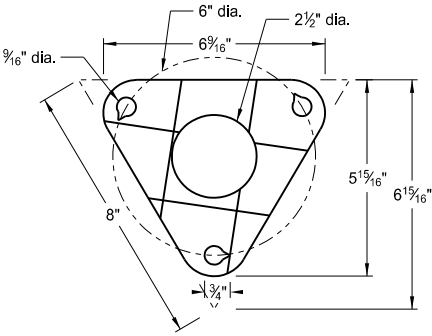

Bolt Retainer for Base Connection
Bolt Retainer- 1/32" Reprocessed Teflon

Notes:

1. Slip base bolts shall be torqued as specified by the manufacturer.
2. Anchor shall have a yield strength of 43.9 KSI and tensile strength of 59.3 KSI.
3. The 4" vertical clearance is required for the anchor or breakaway base. The 4"x60" measurement shall be made above and below post location and also back and ahead of the post.
4. When used in concrete sidewalk, anchor shall be same except without the wings.
5. Four post signs shall have over 7' between the first and the fourth posts.

Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thickness Gauge	Sleeve Size in.	Wall Thickness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 9/64"	2 1/2"	3 1/32"	2 5/32"	1 33/64"	1 7/8"
2 1/2"x10 ga.	1 9/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"



(A) The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak.

(B) The 2 3/16"x10 ga. may be inserted into 2 1/2"x10 ga. for additional wind load.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 2/28/14 and the original document is stored at the
North Dakota Department
of Transportation

U-Channel Post

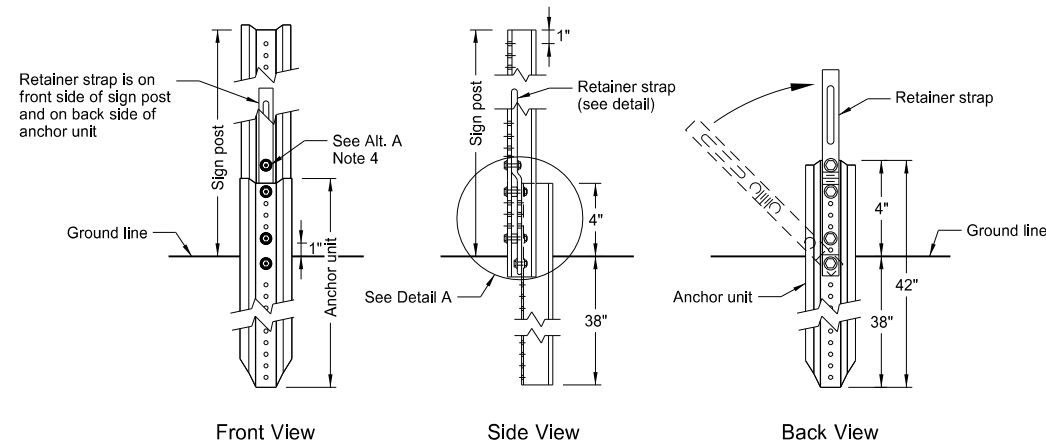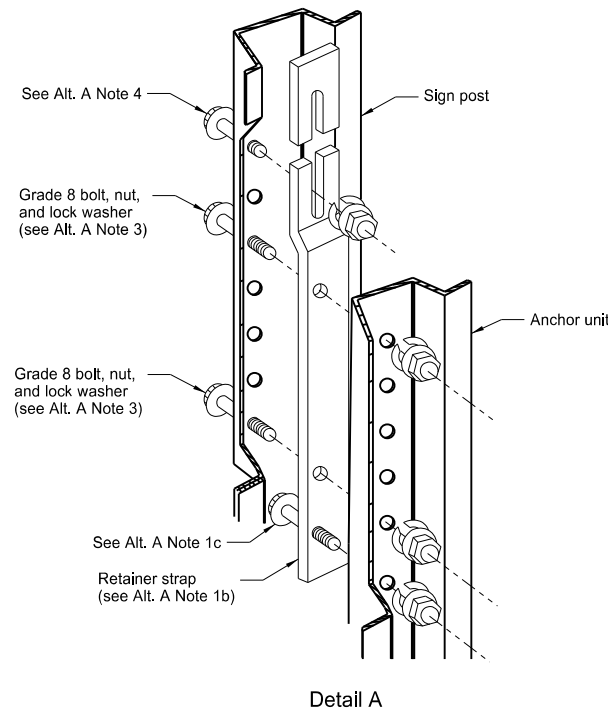


Breakaway U-Channel Detail Alternate A

A maximum of 2 posts shall be installed within 7'.

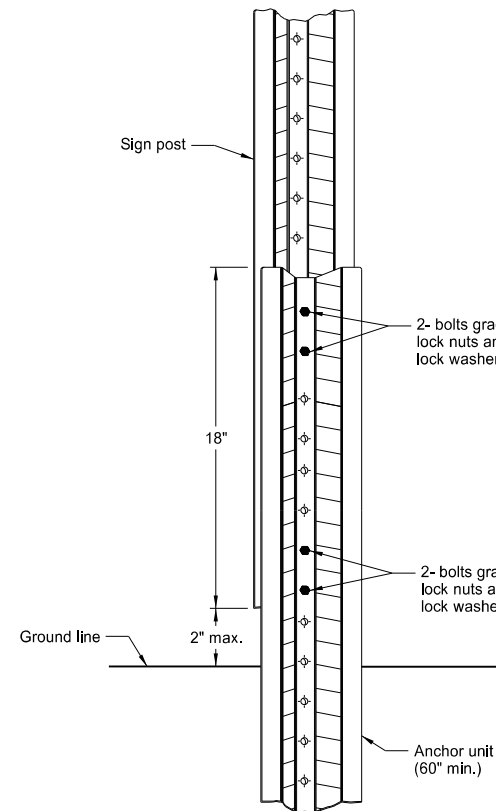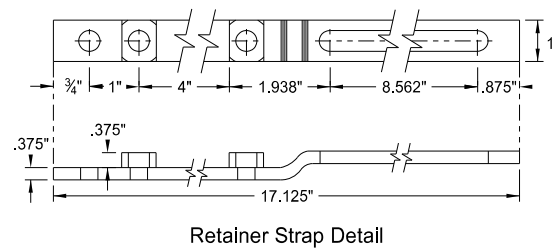

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

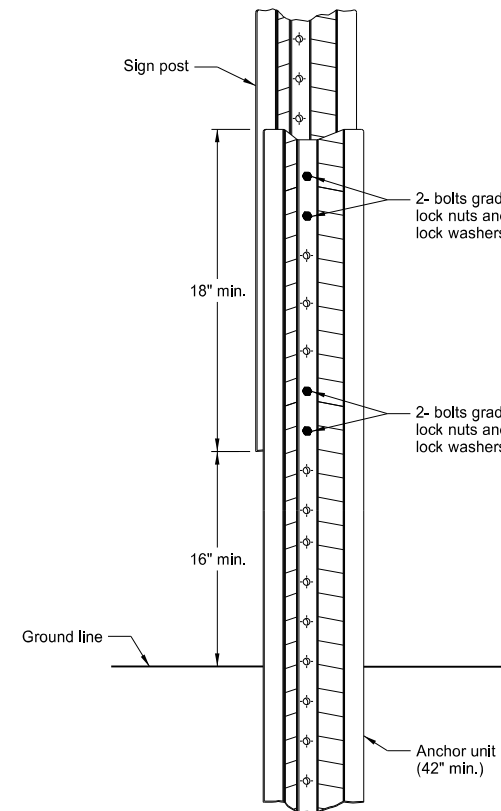

Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

Alternate A Steps of Installation:














- a) Drive anchor unit to within 12" of ground level.
b) Proper assembly established by lining up the bottom hole of retainer strap with the 6th hole from the top of the anchor unit.
c) Assemble strap to back of anchor unit using $\frac{5}{16}$ "x2" bolt, lock washer and nut.
d) Rotate strap 90° to left.
- a) Drive anchor unit to 4" above ground.
b) Rotate strap to vertical position.
- a) Place $\frac{5}{16}$ "x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
b) Alternately tighten two connector bolts.
- Complete assembly by tightening $\frac{5}{16}$ "x2" bolt (this fastens sign post to retainer strap).
- The base post, strap and sign post shall be properly nested. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE- 2930 ,
on 2/28/14 and the original document is stored at the
North Dakota Department
of Transportation

CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS

D-704-9

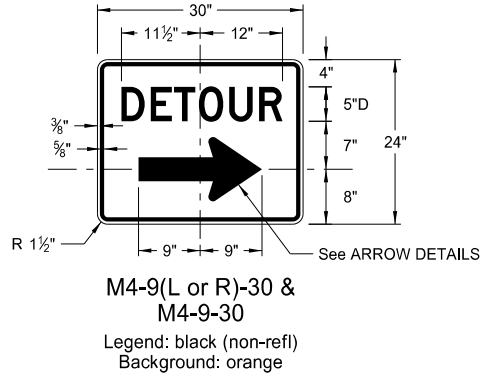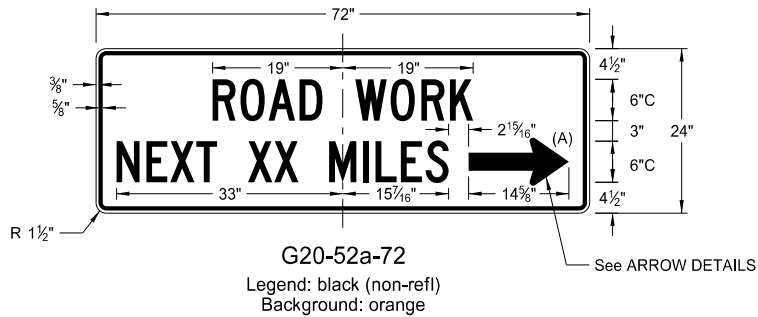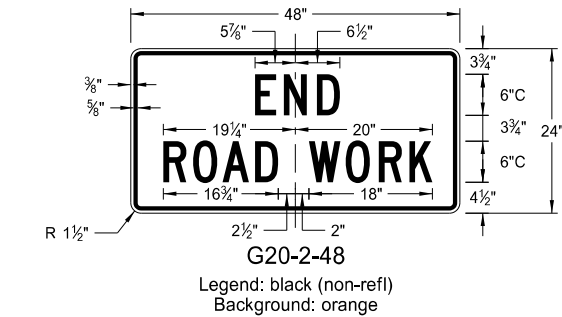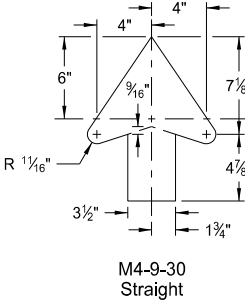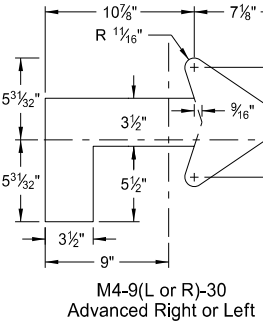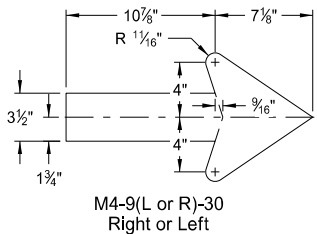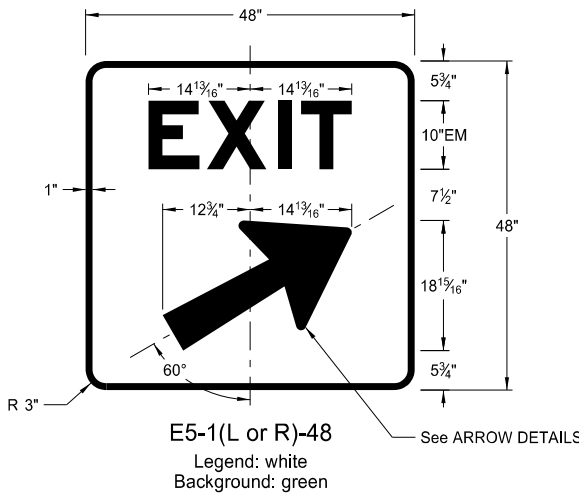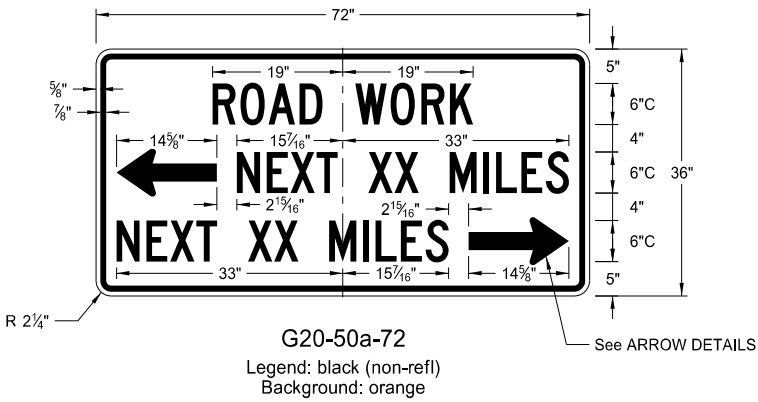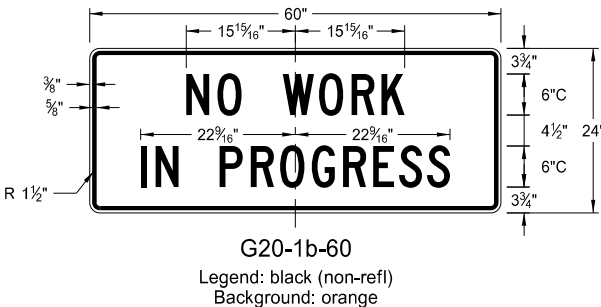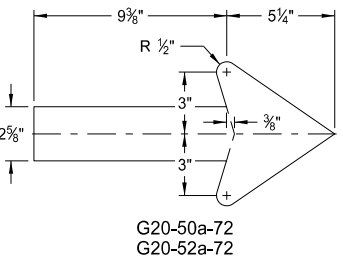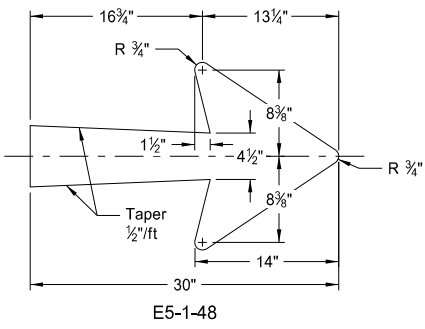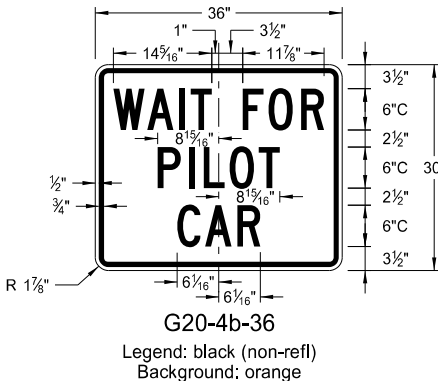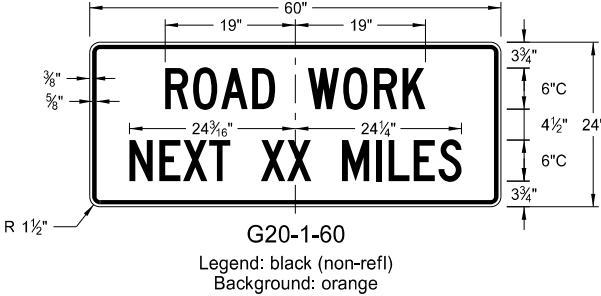

ARROW DETAILS


NOTES:
(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE- 2930 ,
on 8/13/13 and the original document is stored at the
North Dakota Department
of Transportation

CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS


D-704-10

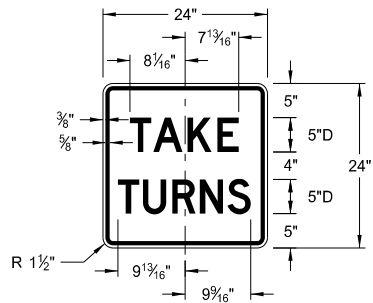


R1-50-24
Legend: black (non-refl)
Background: white

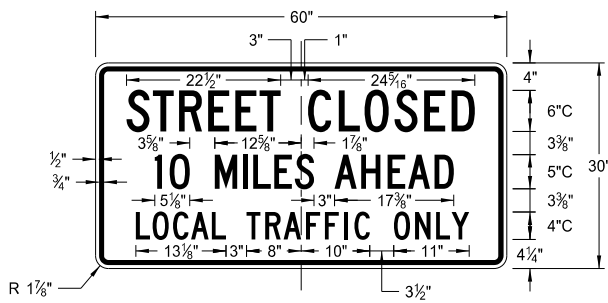


R11-3c-60
Legend: black (non-refl)
Background: white

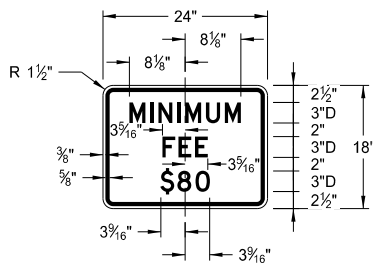

R2-1a-24
Legend: black (non-refl)
Background: white

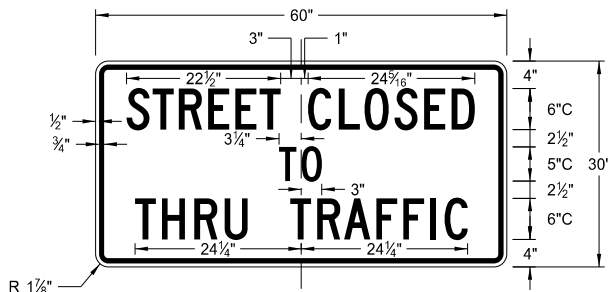

R11-4a-60
Legend: black (non-refl)
Background: white

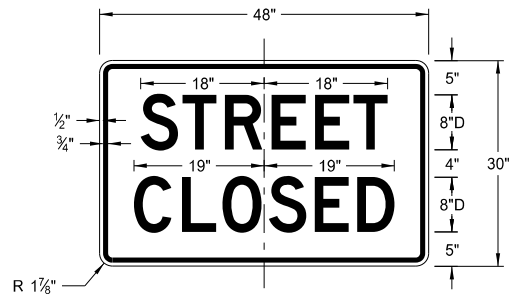


R11-2a-48
Legend: black (non-refl)
Background: white

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE


This document was originally
issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 8/13/13 and the original
document is stored at the
North Dakota Department
of Transportation

CONSTRUCTION SIGN DETAILS
WARNING SIGNS


D-704-11

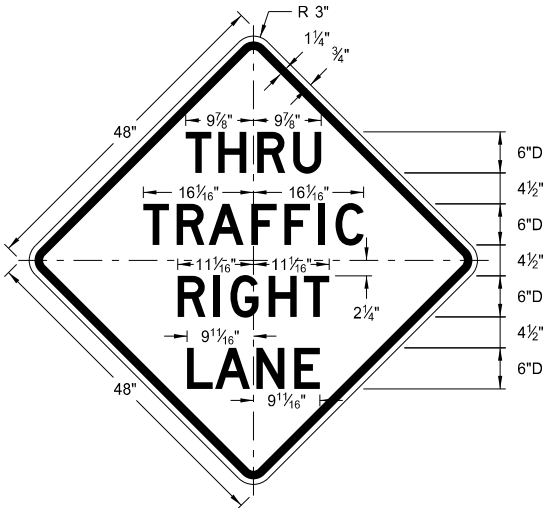


W5-8-48
Legend: black (non-refl)
Background: orange

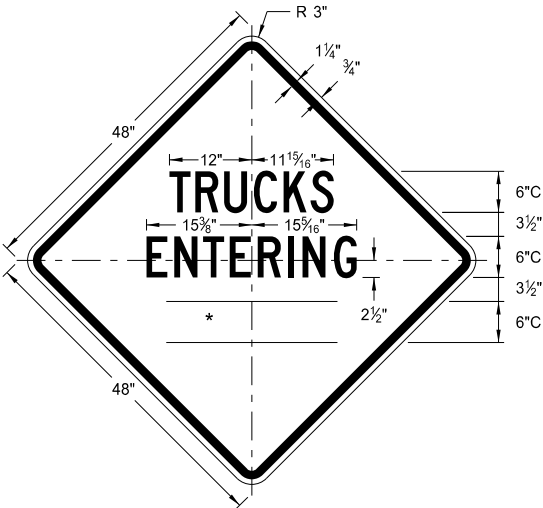

W8-54-48
Legend: black (non-refl)
Background: orange

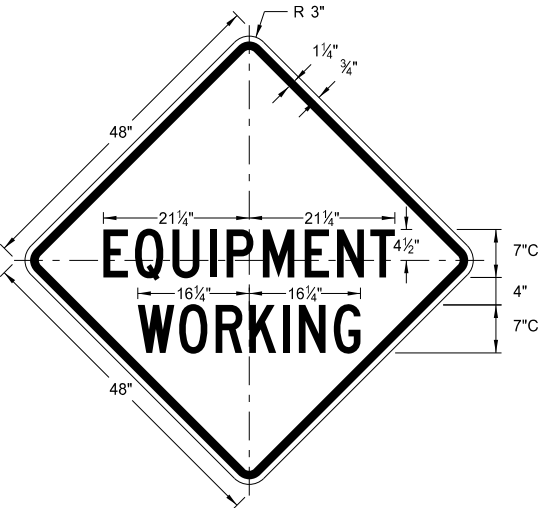


W20-51-48
Legend: black (non-refl)
Background: orange

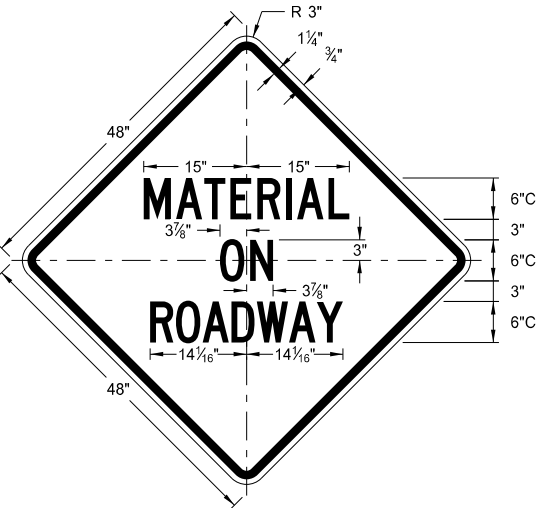

W21-51-48
Legend: black (non-refl)
Background: orange


WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
1/2 MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES

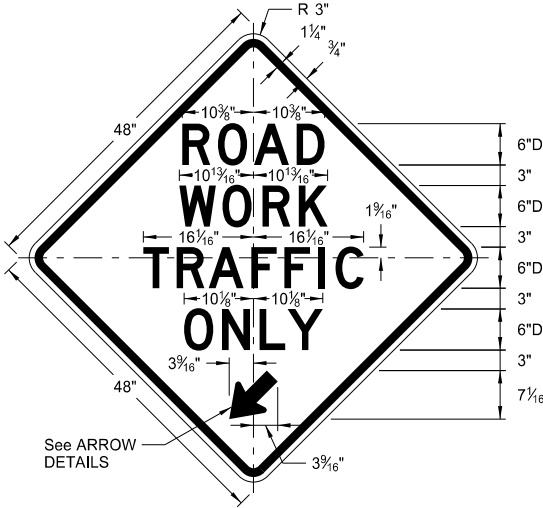


See ARROW
DETAILS


W5-9-48
Legend: black (non-refl)
Background: orange

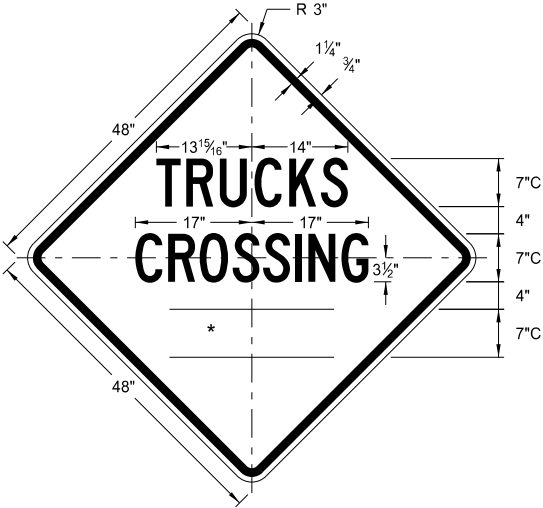


W8-55-48
Legend: black (non-refl)
Background: orange

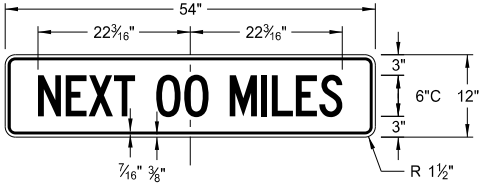


W20-52-54
Legend: black (non-refl)
Background: orange

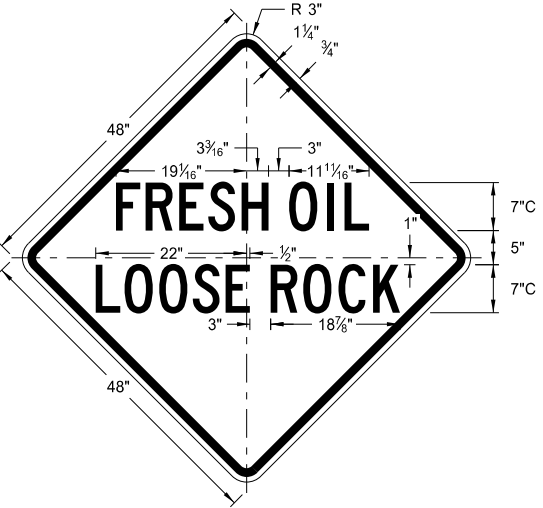


W22-8-48
Legend: black (non-refl)
Background: orange

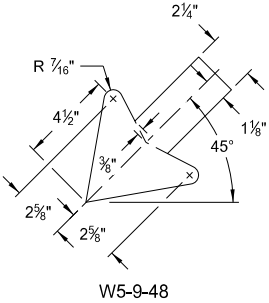


ARROW DETAILS

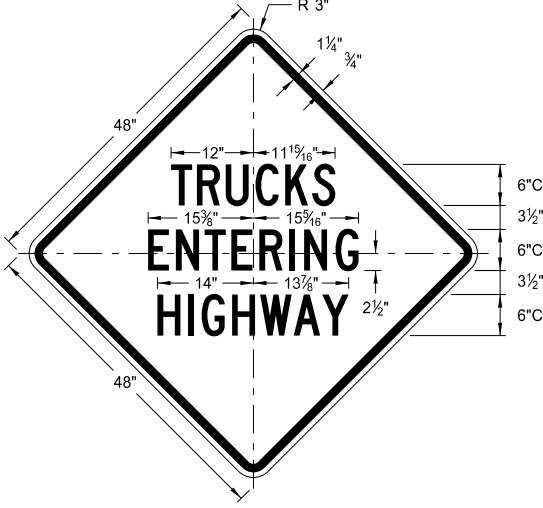

W8-53-48
Legend: black (non-refl)
Background: orange

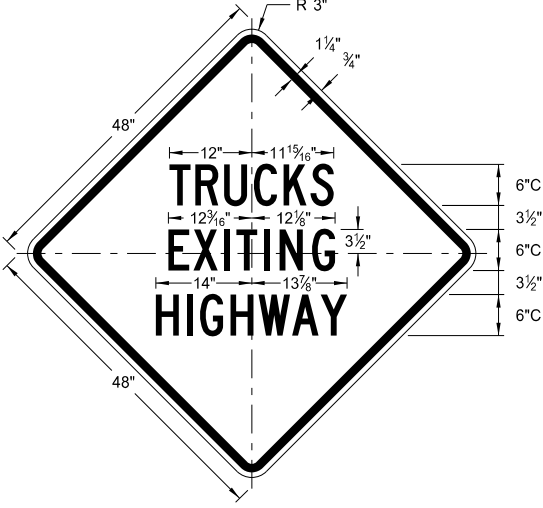

W8-56-48
Legend: black (non-refl)
Background: orange

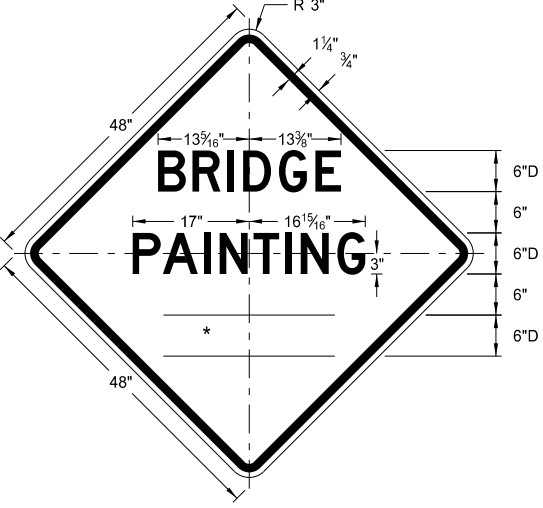


W21-50-48
Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE


This document was originally
issued and sealed by
Roger Weigel,
Registration Number
PE- 2930 ,
on 8/13/13 and the original
document is stored at the
North Dakota Department
of Transportation

SHOULDER CLOSURE TAPERS


D-704-12

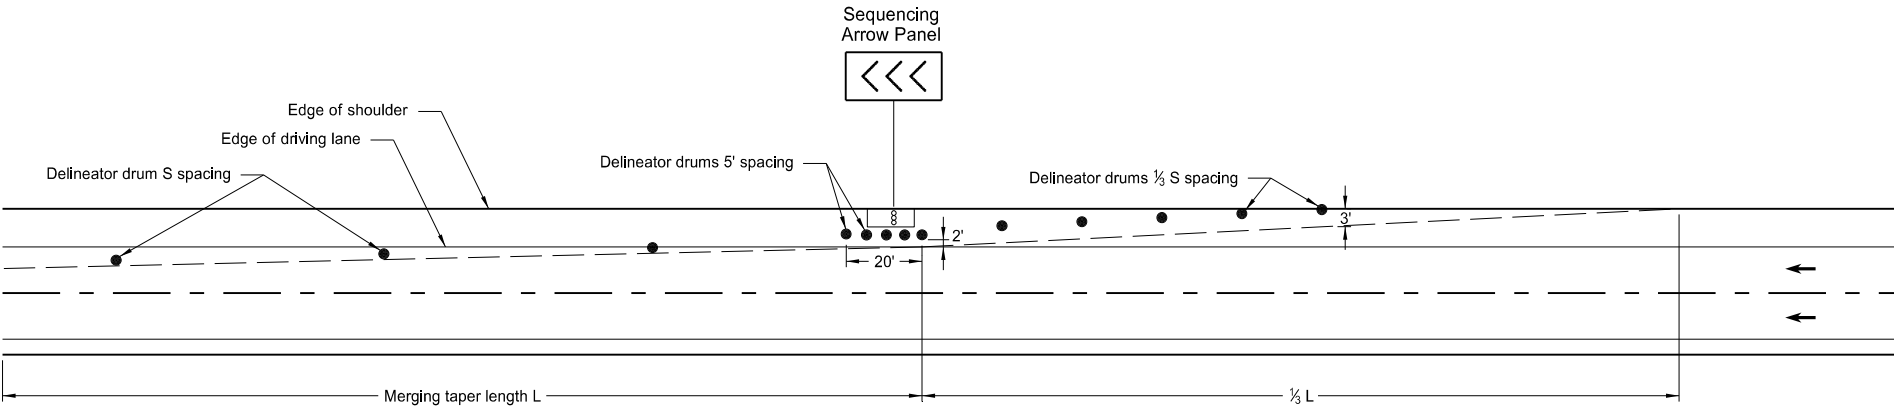

SHOULDER CLOSURE WITH LANE CLOSURE
(when shoulder is 8' or wider)

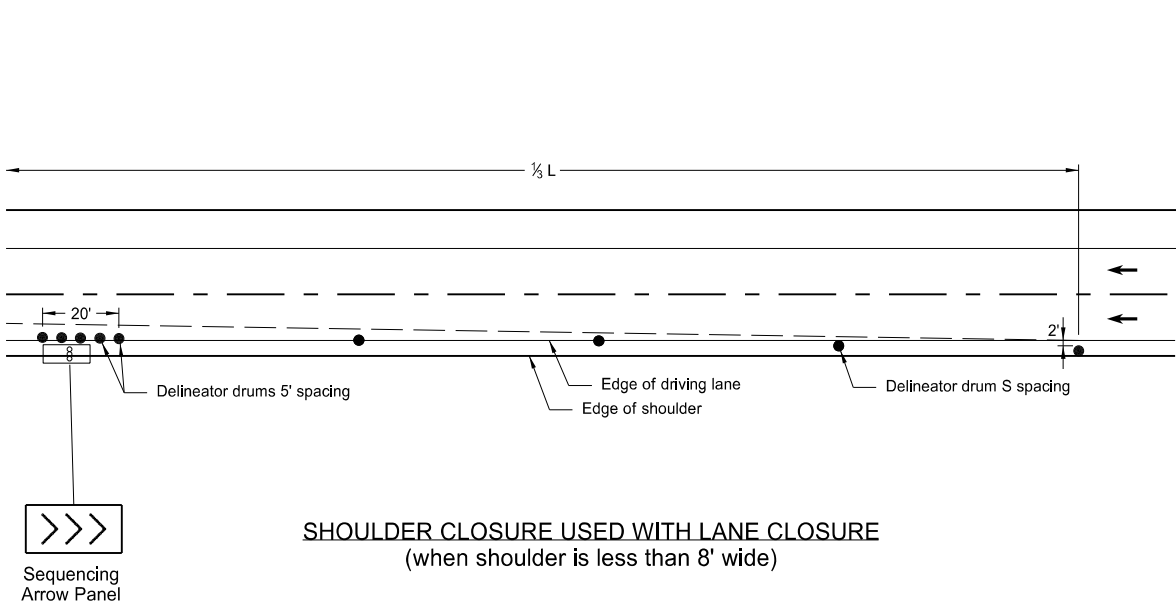

SHOULDER CLOSURE USED WITH LANE CLOSURE
(when shoulder is less than 8' wide)

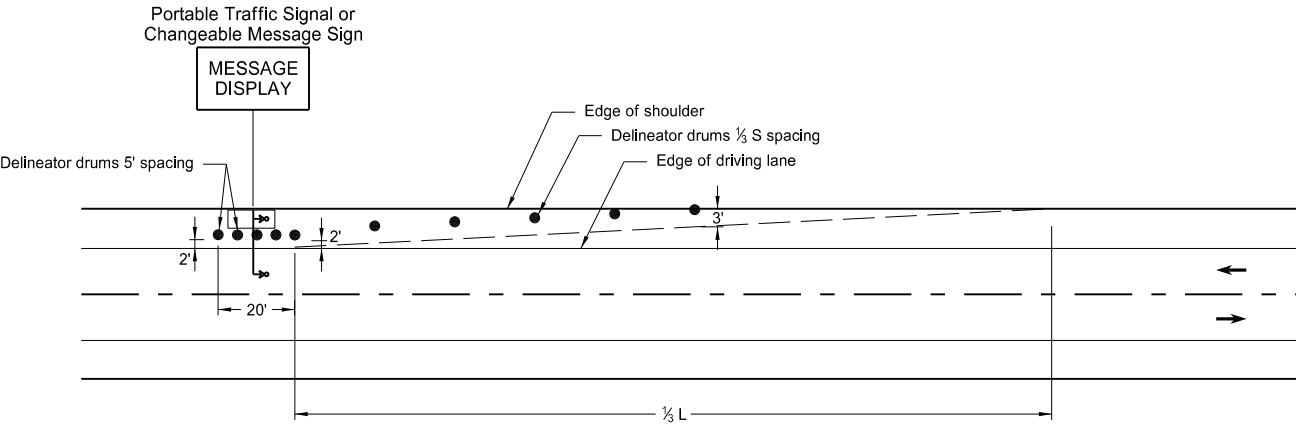

PORTABLE TRAFFIC SIGNAL OR CHANGEABLE MESSAGE SIGN ON SHOULDER

KEY			
●	Delineator Drum	∞	Sequencing Arrow Panel
•	Message Display	↳	Portable Traffic Signal


- Notes:
- S = Posted Speed Limit in mph
W = Width of offset in feet
L = Taper length in feet
 $L = WS^2/60$ (40mph or less)
 $L = WS$ (45mph or more)
 - If a shoulder taper is used, it should have a length of approximately $1/3L$. If a shoulder is used as a travel lane, a normal merging or shifting taper should be used.
 - When paved shoulders of 8 foot width or more are closed, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel
Registration Number
PE-2930,
on 10/3/13 and the original document is stored at the
North Dakota Department
of Transportation


BARRICADE AND CHANNELIZING DEVICE DETAILS

D-704-13

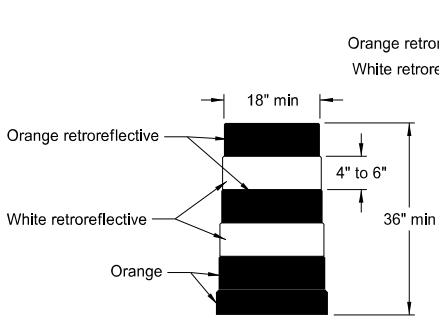


DELINEATOR DRUM

The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED spaces between the horizontal orange and white stripes shall not exceed 3" wide. Stripes shall not be placed on ribs or indentations in the drum. Drums shall have closed tops that will not allow collection of construction debris or other debris. Ballast shall not be placed on the top of a drum.

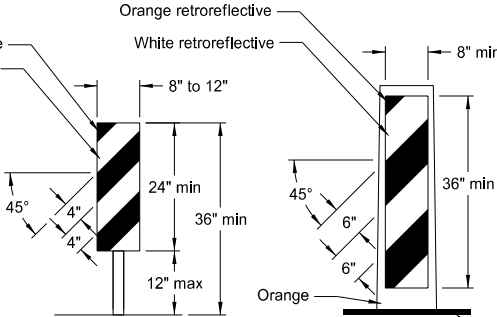


VERTICAL PANEL

Markings for vertical panels shall be alternating orange and white retroreflective stripes, sloping downward in the direction vehicular traffic is to pass. Retroreflective sheeting shall be placed on both sides of panel and shall have a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.

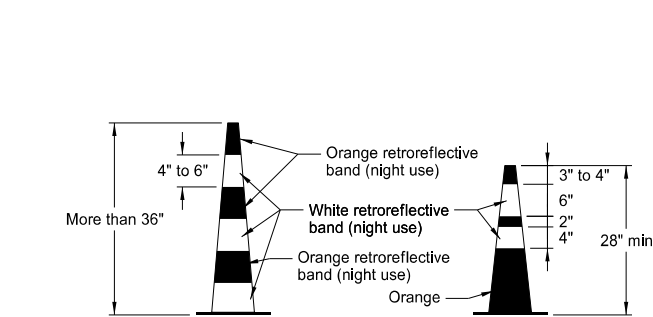


TRAFFIC CONE

RetroreflectORIZATION of cones more than 36" in height shall be provided by alternating orange and white retroreflective stripes. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED space between the orange and white stripes shall not exceed 3" wide.

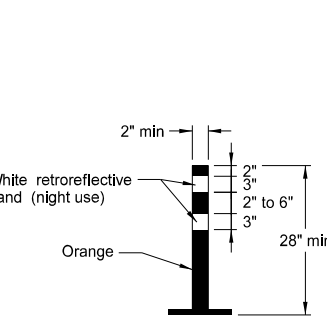

TUBULAR MARKER


RetroreflectORIZATION of tubular markers more than 42" in height shall be provided by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

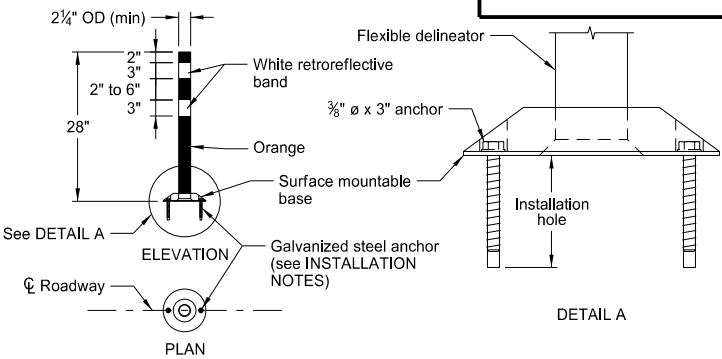

FLEXIBLE DELINEATOR


INSTALLATION NOTES:

1. Drill installation holes to diameter and depth as required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, the contractor may use an 8" x 8" butyl pad or hot melt butyl. Butyl shall be removed as close as possible to pavement surface.

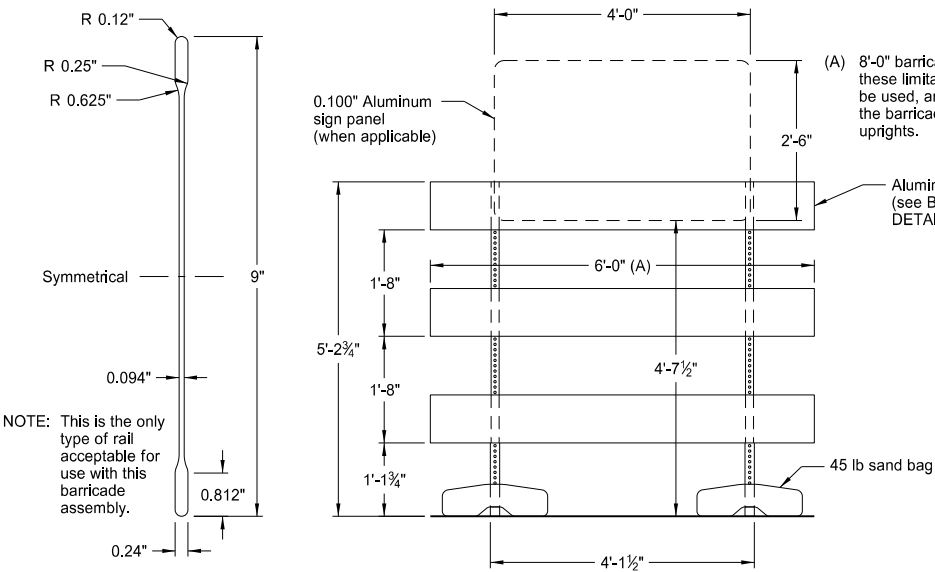


BARRICADE BLADE DETAIL


NOTE: This is the only type of rail acceptable for use with this barricade assembly.

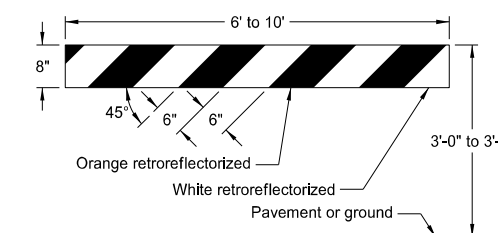

TYPE I BARRICADE

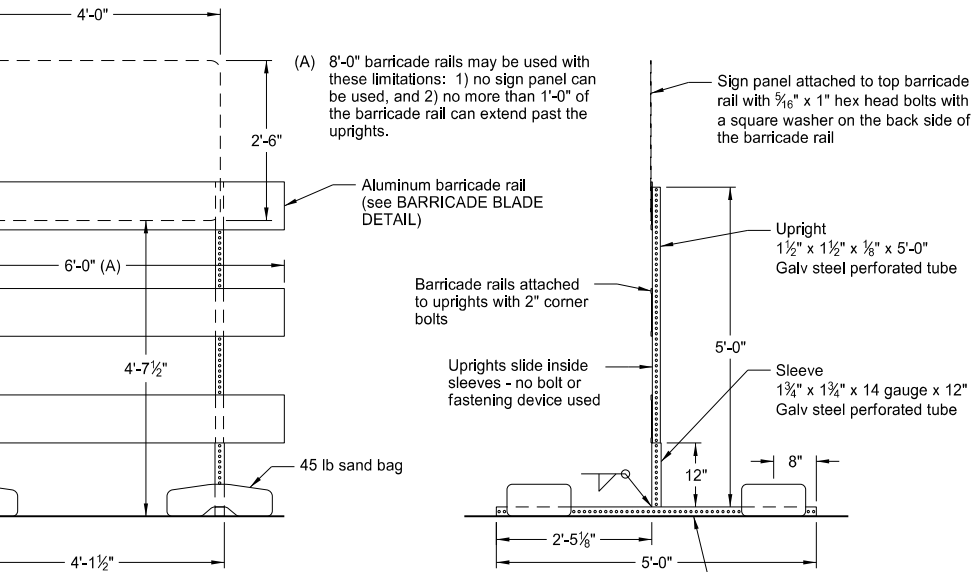


BARRICADE ASSEMBLY DETAIL
(Aluminum Barricade Rails)

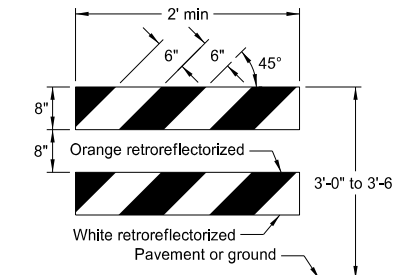


TYPE II BARRICADE


BARRICADE RAIL DETAILS

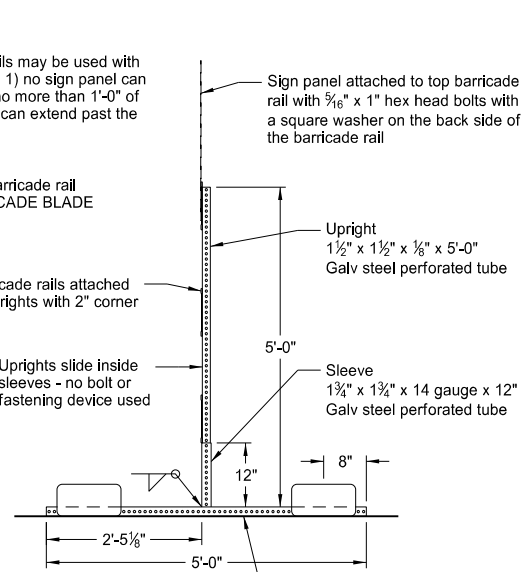

TYPE III BARRICADE

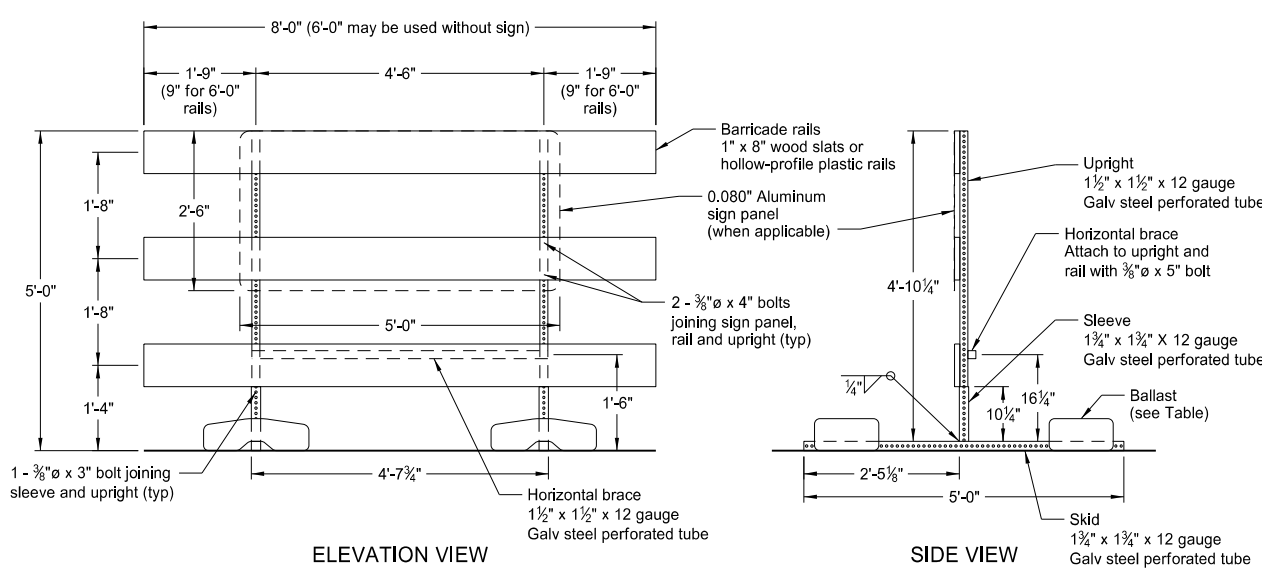

BARRICADE ASSEMBLY DETAIL
(Wood or Plastic Rails)

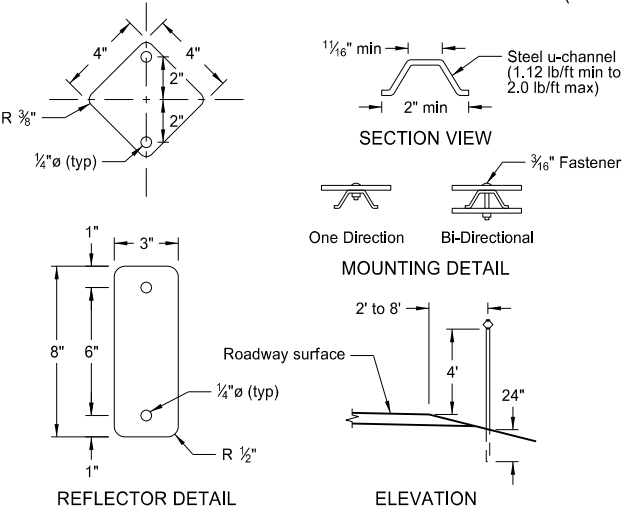

DELINEATORS

MINIMUM BALLAST
(For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 10/3/13 and the original document is stored at the
North Dakota Department
of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS

Note: Signs placed in sections with curb shall have a minimum horizontal clearance of 2' from the face of the curb to the near edge of the sign.

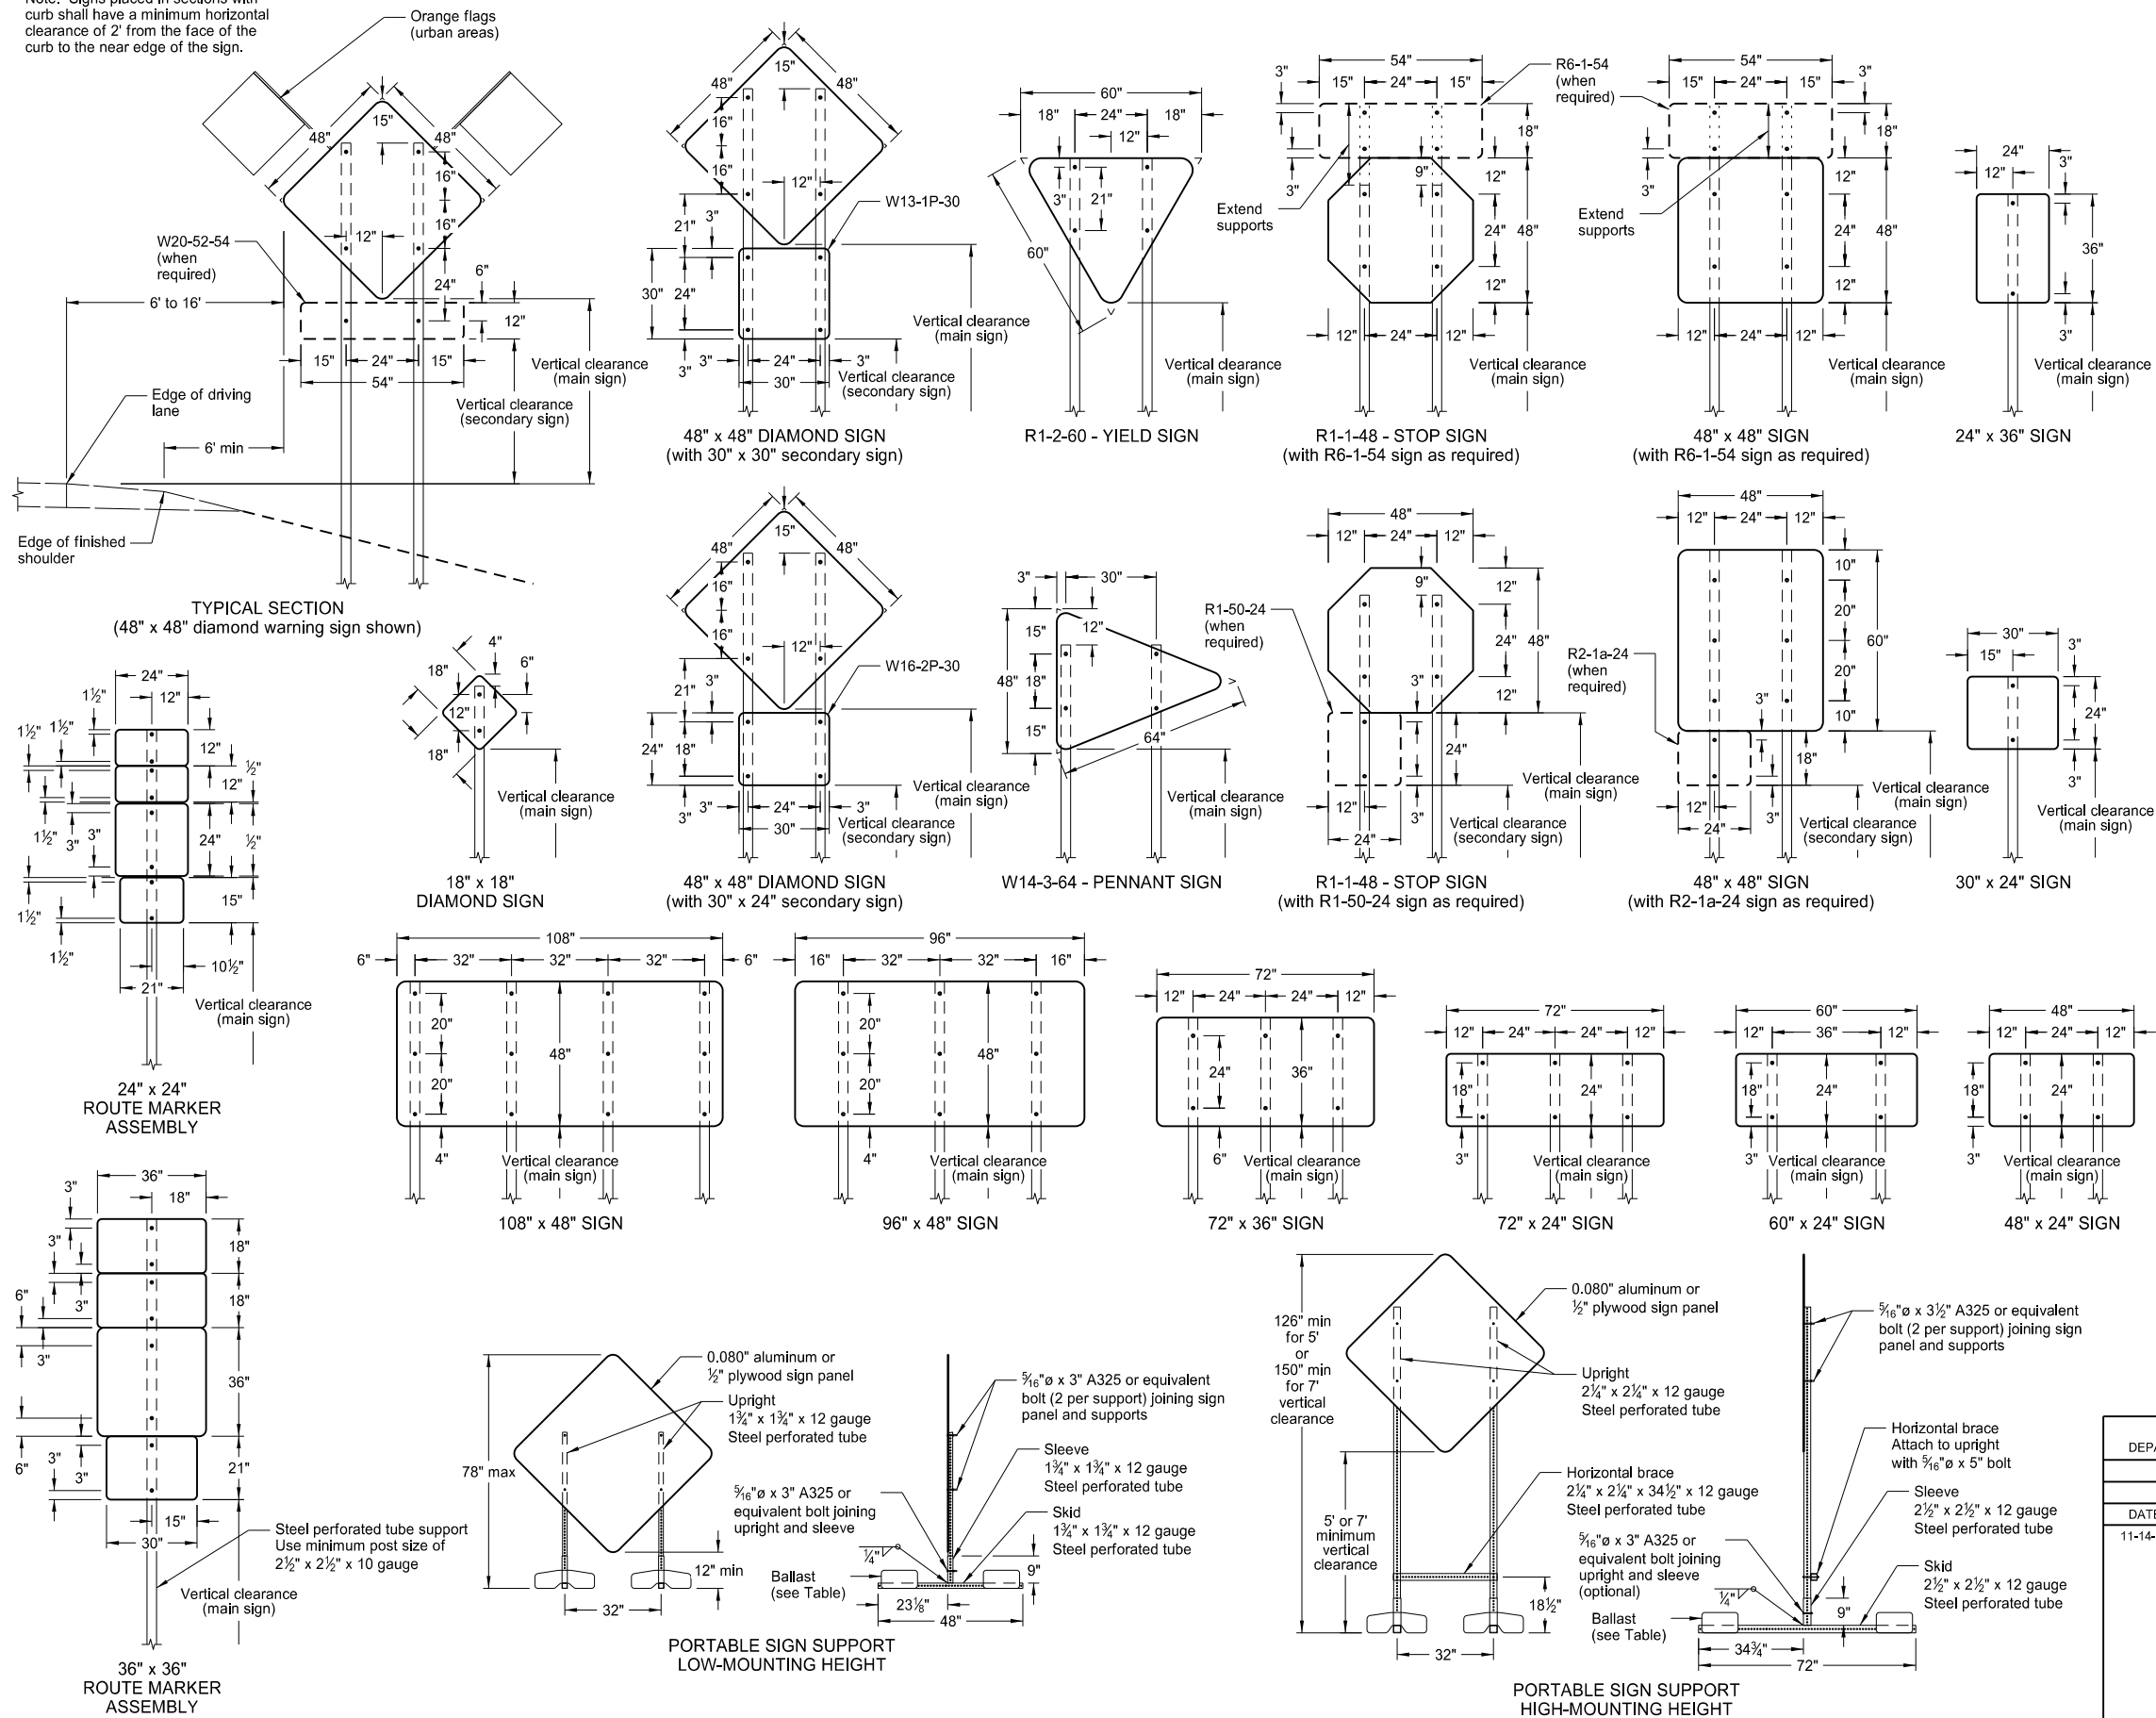

NOTES:

1. Sign Supports: Supports shall be galvanized or painted. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, the minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes are based on a wind speed of 55 MPH.

Signs over 50 square feet should be installed on 2 1/2" x 2 1/2" perforated tube supports as a minimum.

Guy wires shall not be attached to sign supports. Wind beams may be attached to u-posts behind the sign panels.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, 1/2" plywood, or other approved material, except where noted. All holes to be punched round for 3/8" bolts.

3. Alternate Messages: The signs that have alternate messages may have these alternate messages placed on a reflectorized plate (without a border) and installed and removed as required. (i.e. "Left" and "Right" message on a lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance as stated above.

Large signs having an area exceeding 50 square feet shall have a minimum clearance of 7'-0" from the ground at the post.

6. Portable Signs: Provide portable signs that meet the vertical clearance as stated above. Use portable signs when it is necessary to place signs within the pavement surface.

When portable signs are used for 5 days or less, low-mounting height (minimum 12" vertical clearance) sign supports may be used as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. The R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 may be used for longer than 5 days.

Signs mounted to the portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT Details shall have a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10


Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6.

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 11/14/13 and the original document is stored at the
North Dakota Department
of Transportation

SIGN LAYOUT FOR INTERSTATE SYSTEM ONE LANE CLOSURE

D-704-18

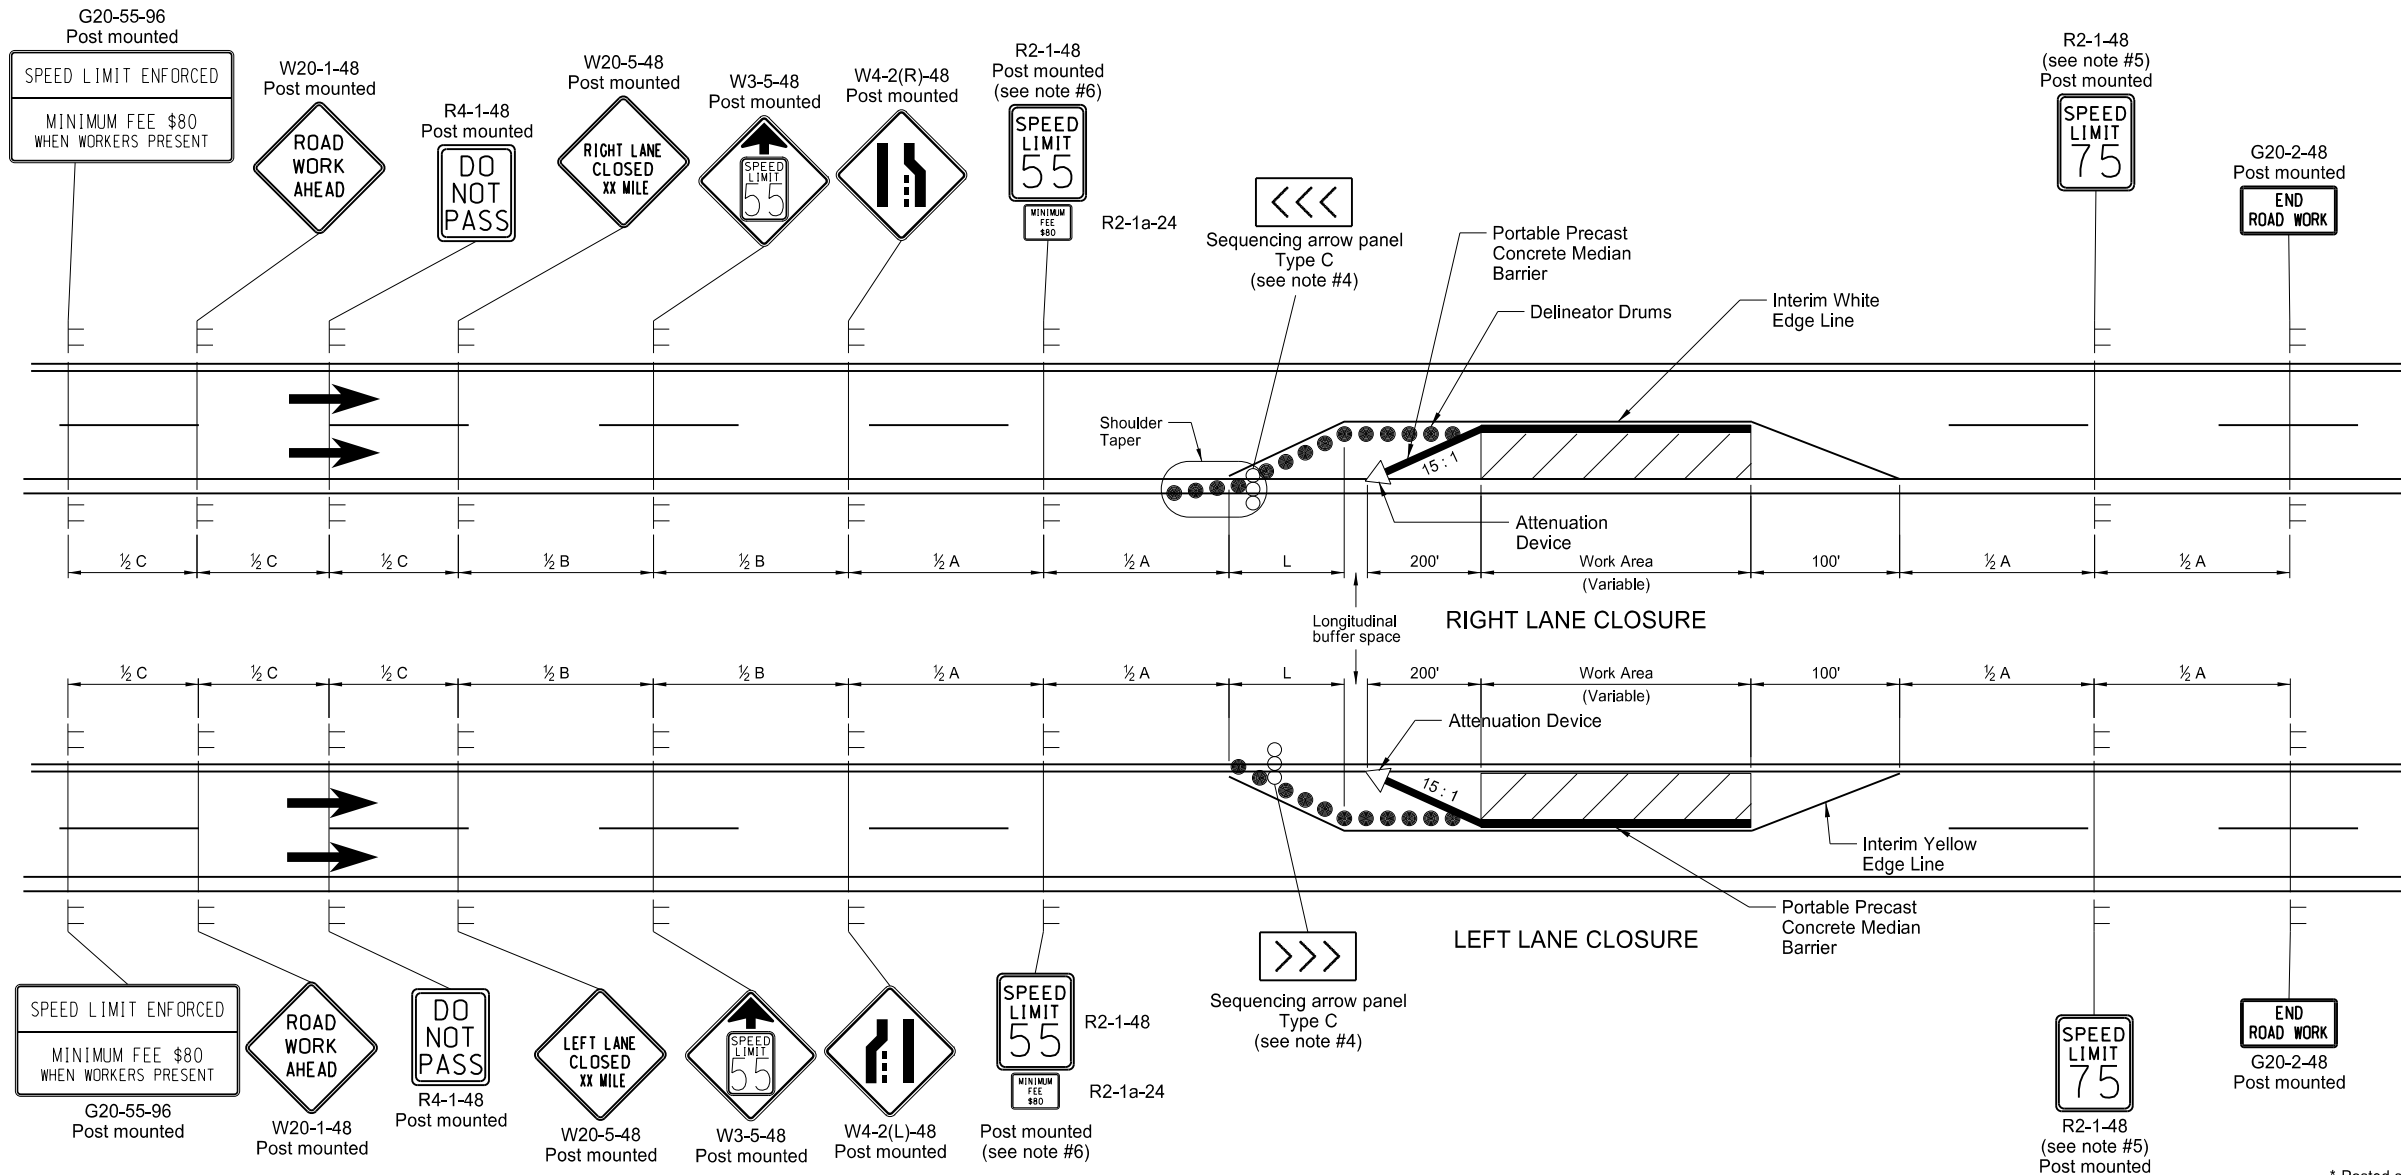

KEY

- Delineator Drum
- Sign
- Attenuation Device
- Sequencing Arrow Panel
- Work Area

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

- Notes
- Variables
 - S = Numerical value of speed limit or 85th percentile.
 - W = The width of the taper.
 - L = Minimum length of taper, or S x W for freeways, expressways, and all other roads with speeds of 45 mph or greater, or W x S² /60 for urban, residential, and other streets with speeds of 40 mph or less.
 - Barricades placed on roadway shall be on a moveable assembly. Signs placed on the roadway shall be placed on skid mounted assemblies.
 - Delineator drums used for tapering traffic and on the tangent shall be spaced at the dimension "S".
 - Sequencing Arrow Panels
 - Panels should normally be placed at the beginning of the taper. Where shoulder width does not provide sufficient room, the panel should be moved closer to the work area so that it can be placed on the roadway surface. See Shoulder Closure Standard Drawing.
 - Type A shall be used on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
 - Type B shall be used on roadways with moderate traffic speeds and volumes (40 mph or less and less than 5000 ADT).
 - Type C shall be used on roadways with high traffic speeds and volumes (over 40 mph or 5000 ADT or greater).
 - The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
 - The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at ½ B.

- When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
- Existing speed limit signs within a reduced speed zone shall be covered.
- The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications. G20-55-96 sign is not required if this standard is part of other traffic control layouts, or the work is less than 15 days.


* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
1-13-16	Changed to interim yellow edge line

This document was originally issued and sealed by
Roger Weigel
Registration Number
PE- 2930 ,
on 01/13/16 and the original document is stored at the
North Dakota Department
of Transportation

CONSTRUCTION TRUCK AND TEMPORARY DETOUR LAYOUTS

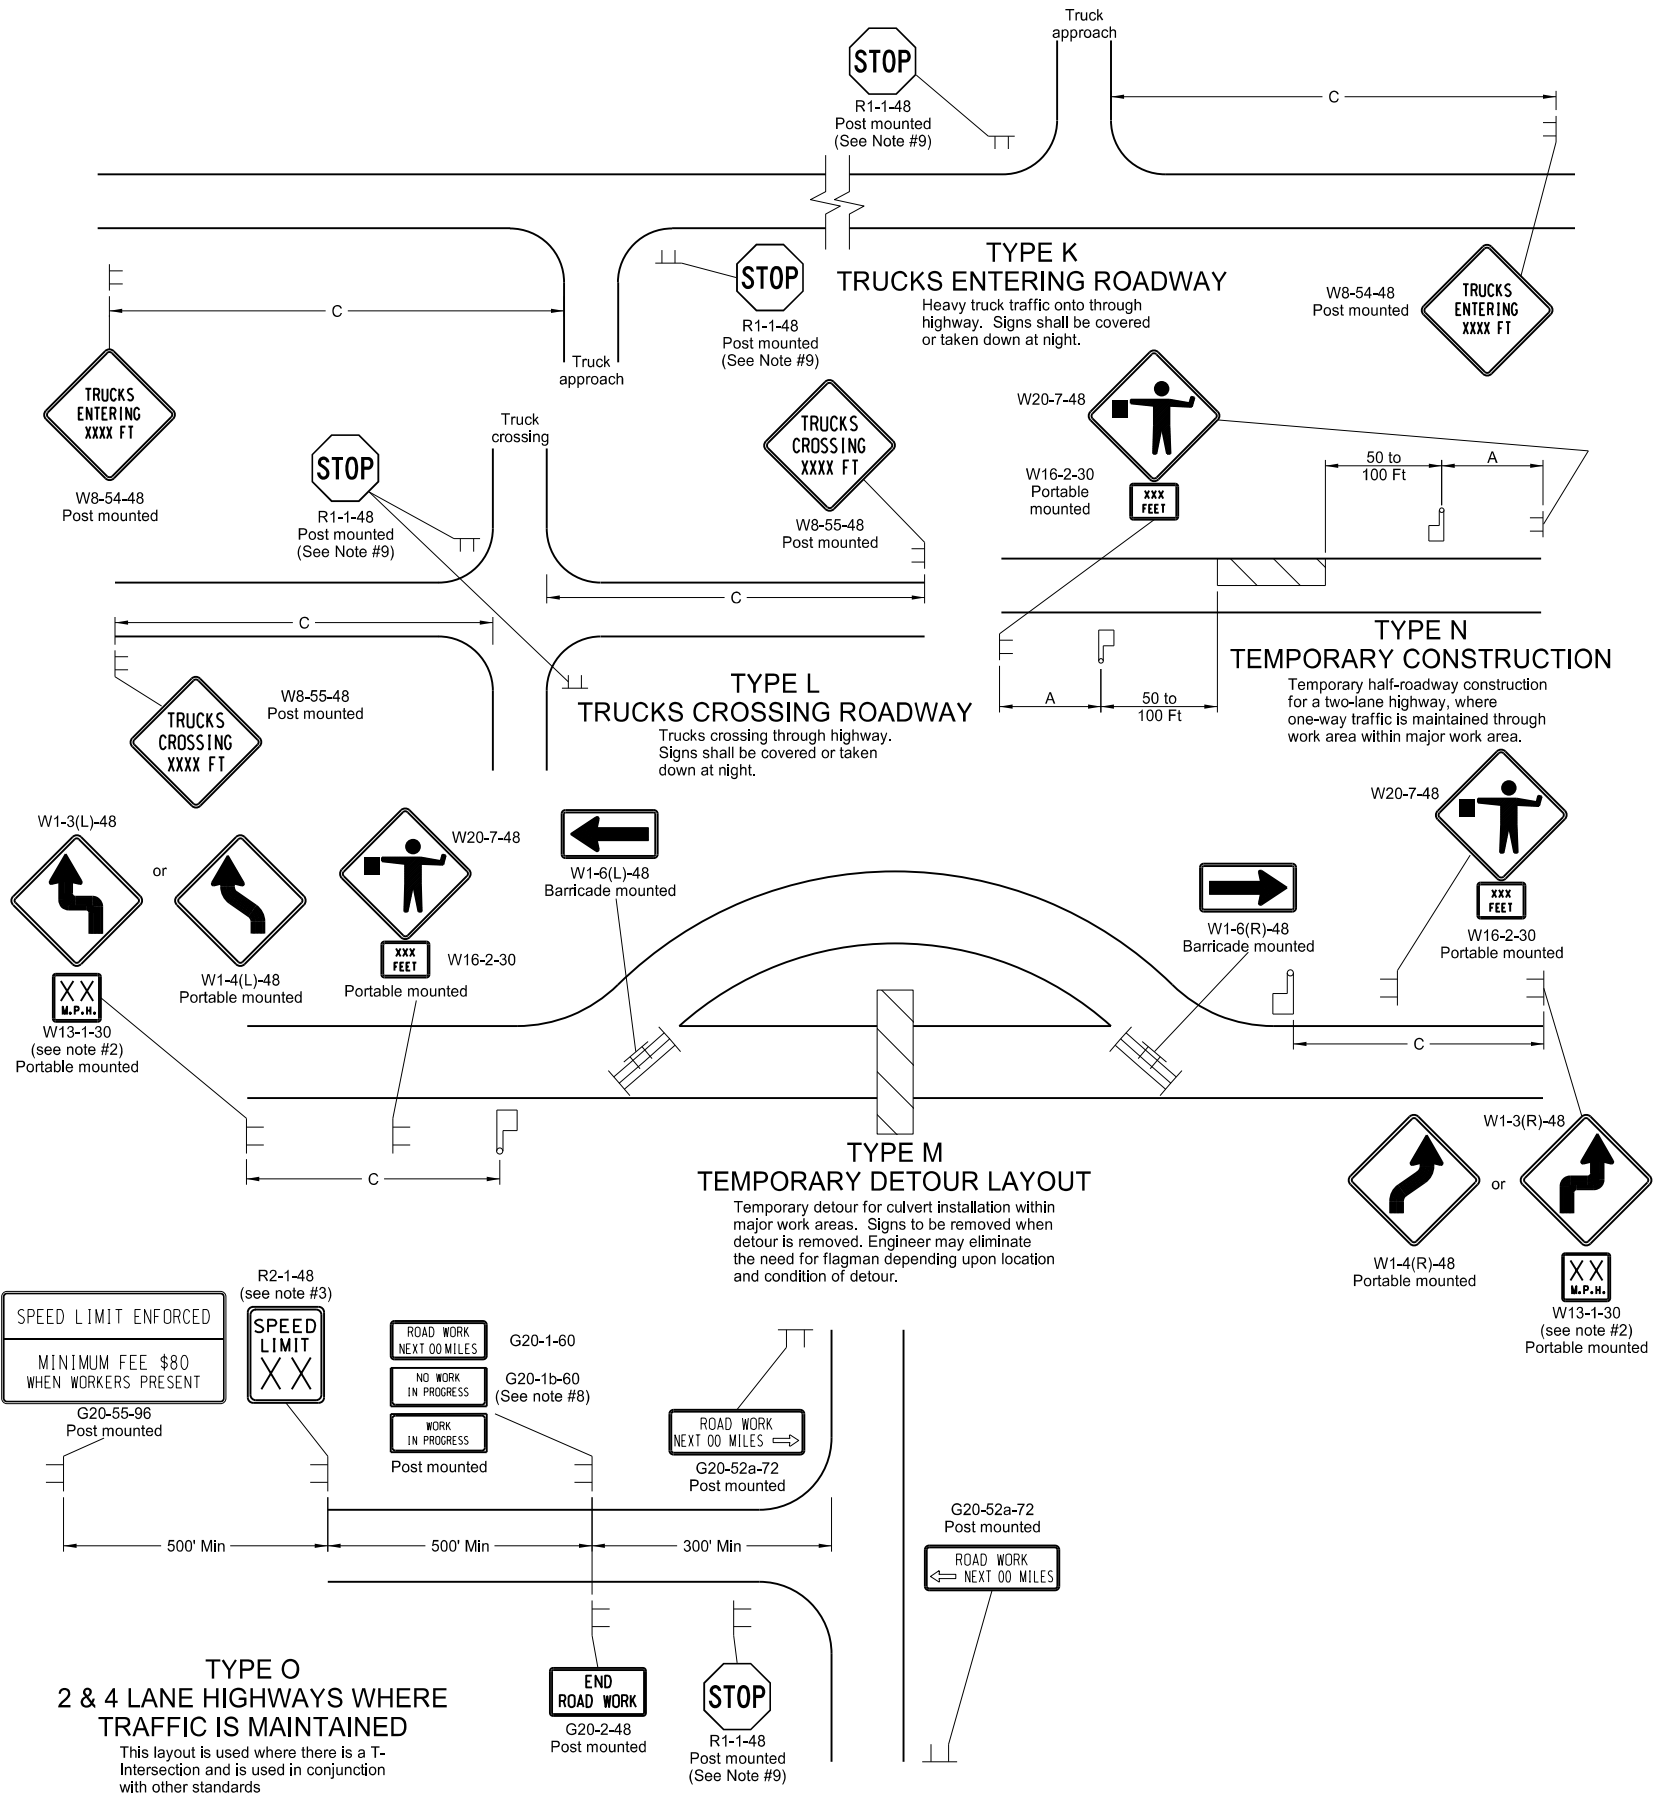

- Notes
1. Barricades placed on roadway shall be on a moveable assembly. Signs placed on the roadway shall be placed on skid mounted assemblies. Where necessary, safe speed to be determined by the Engineer.
 2. The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at ½ B.
 3. When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
 4. Existing speed limit signs within a reduced speed zone shall be covered.
 5. Obliterated or covered pavement marking shall be paid for as Obliteration of Pavement Marking. The covering shall be approved by the engineer.
 6. The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.
 7. The contractor shall install the G20-1b-60 sign when work is suspended for winter.
 8. If existing stop sign is in place, a 48" stop sign is not required.
 9. G20-55-96 sign is not required if this standard is part of other traffic control layouts with this sign or the work is less than 15 days.
 - 10.

KEY

Type III barricade

Work area

Sign


Flagger

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500




NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel
Registration Number
PE- 2930,
on 09/27/13 and the original document is stored at the
North Dakota Department
of Transportation

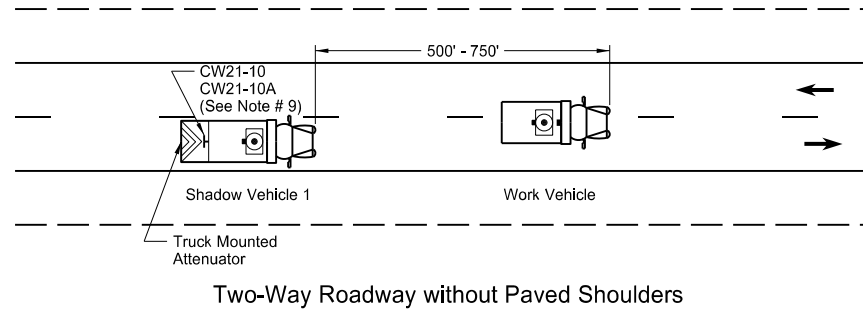






D-704-27

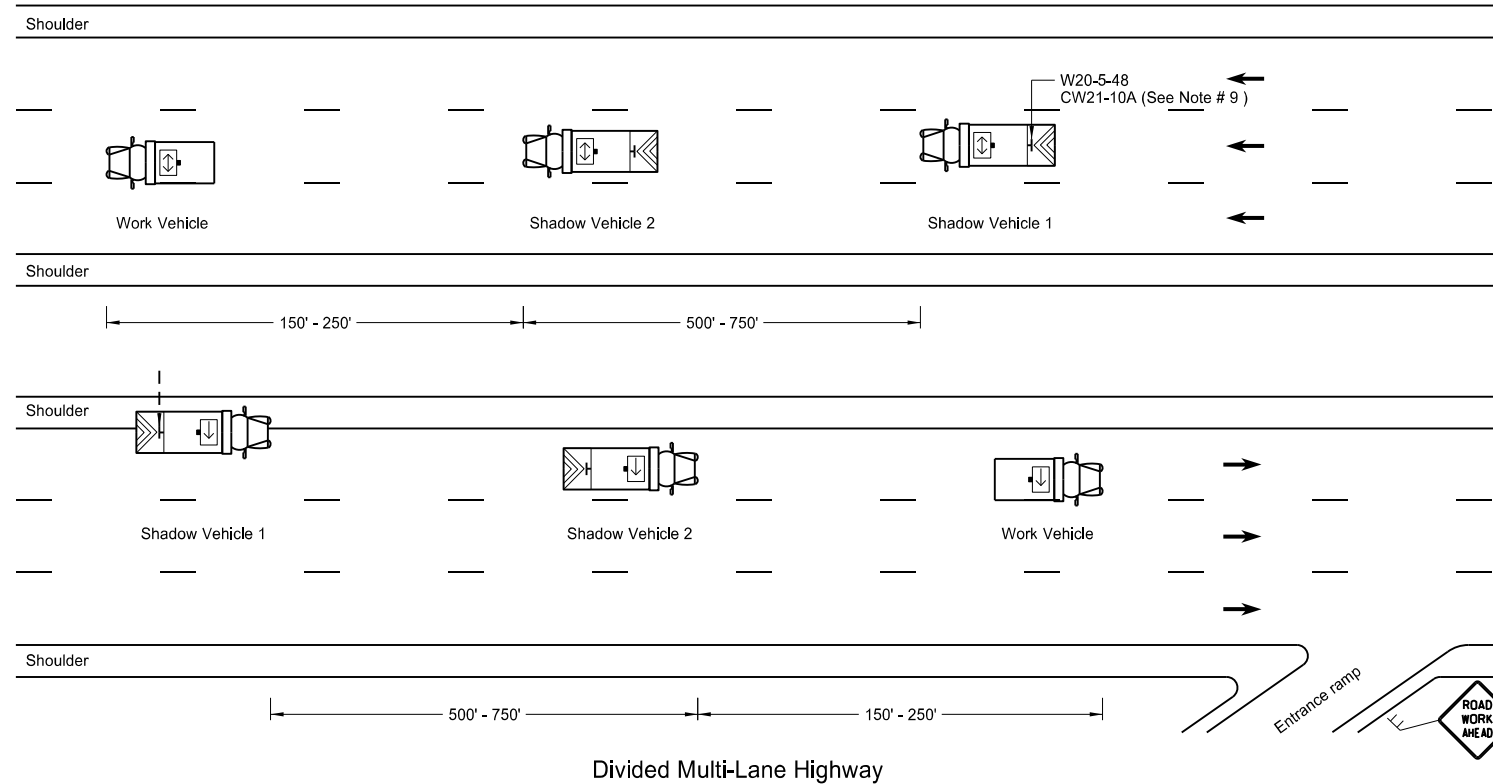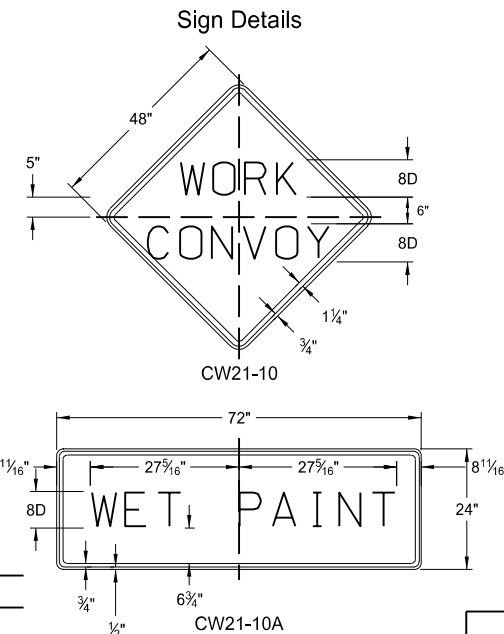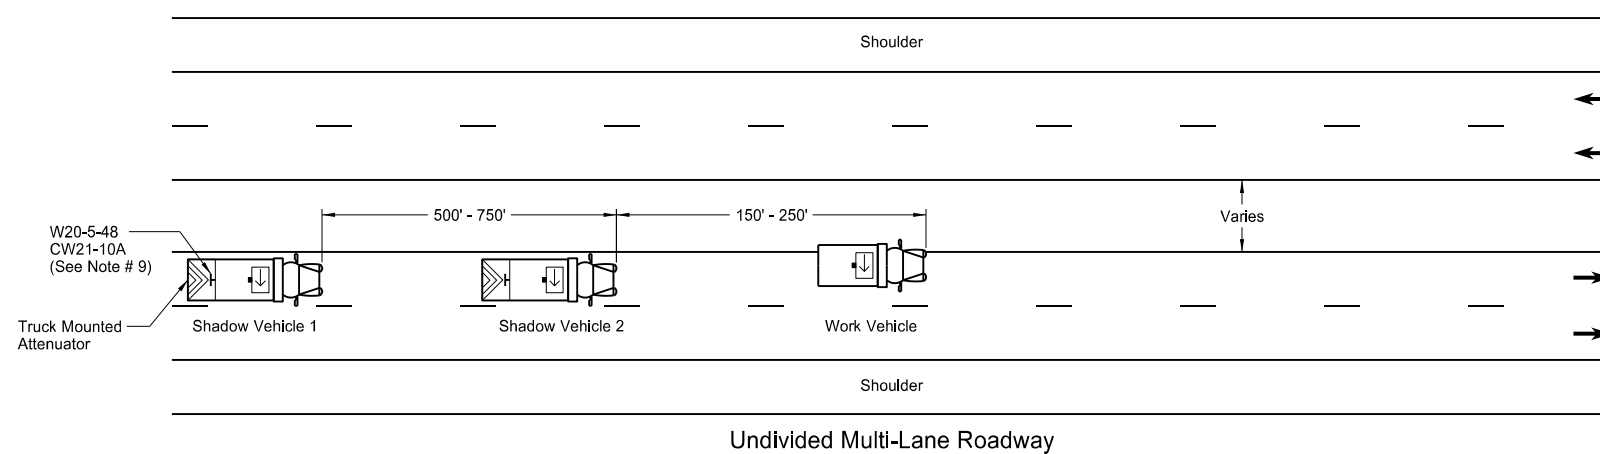

- Notes
1. If the contractor chooses to place more vehicles in the convoy than are shown, these vehicles shall have the truck mounted attenuator and shall be at the contractor's expense.
2. Shadow and work vehicles shall display yellow rotating beacons or strobe lights unless otherwise stated elsewhere in the plans.
3. Flashing arrow panels shall be Type B or Type C. The panel operation shall be controlled from inside the vehicle.
4. Each vehicle shall have two-way electronic communication capability.
5. When work convoys must change lanes, shadow vehicle 1 should change lanes first to shadow other convoy vehicles.
6. Vehicle spacing between the shadow vehicle 1 and shadow vehicle 2 will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the trail vehicle in time to slow down and/or change lanes as they approach the shadow vehicle.
7. Sign Colors
 - Letters = Black
 - Border = Black
 - Background = Orange
8. Shadow vehicle 2 may be used as the paint tender vehicle.
9. Sign CW21-10A shall only be used during a painting operation.
10. On two lane - two way roadways, the work and shadow vehicles should pull over periodically to allow motor vehicle traffic to pass.



KEY


	Sign
	Truck mounted attenuator
	Flashing arrow panels:
	Right directional
	Left directional
	Double arrow directional
	Caution Mode

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
6-18-14	Removed shadow vehicle 2 on two lane roadways


This document was originally
issued and sealed by
Roger Weigel
Registration Number
PE- 2930 ,
on 06/18/14 and the original
document is stored at the
North Dakota Department
of Transportation

PORTABLE PRECAST CONCRETE MEDIAN BARRIER
(TEMPORARY USAGE)


D-704-51

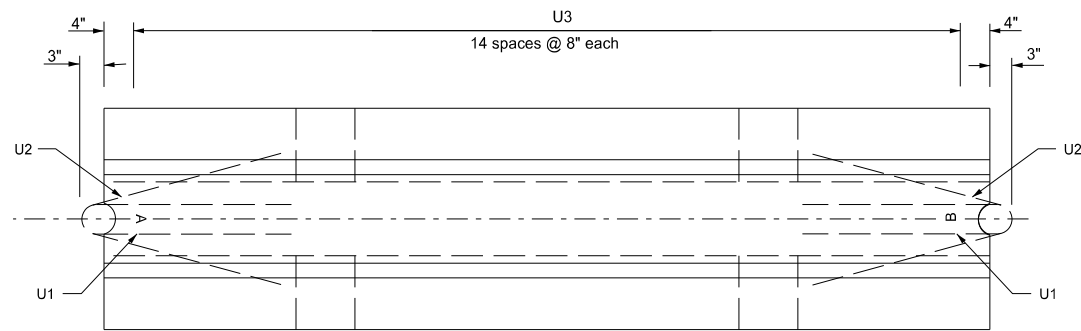

Plan View

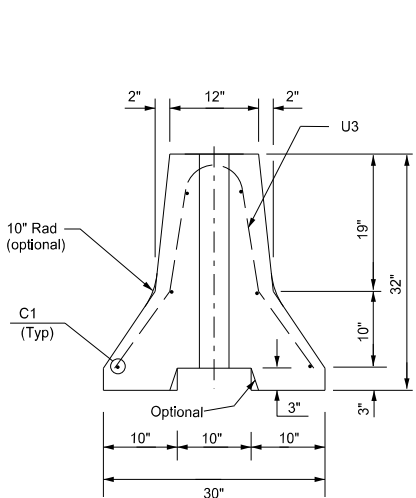


End View

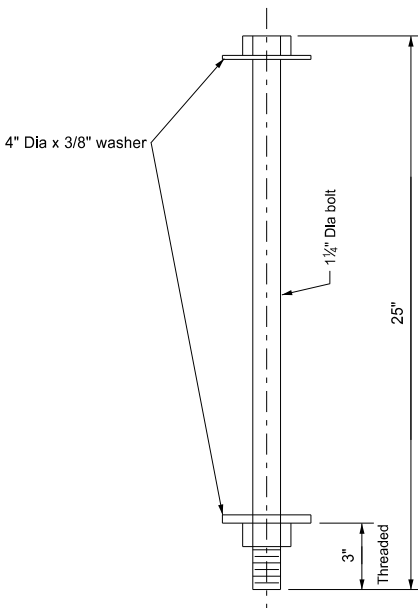


Connecting Bolt Detail


(One per 10 Ft section)

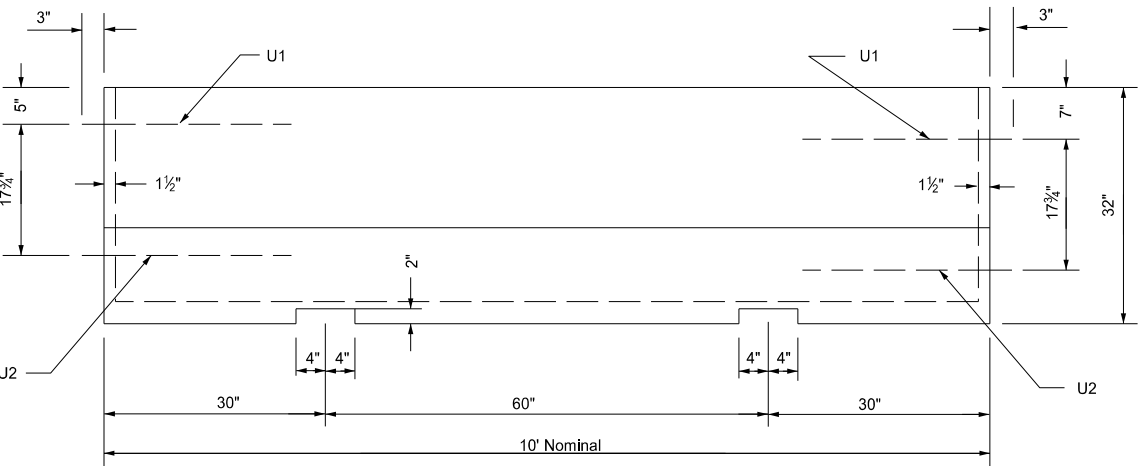

Side View

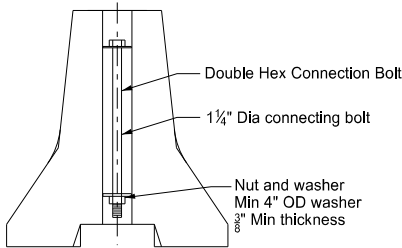

Bolt Connection Detail

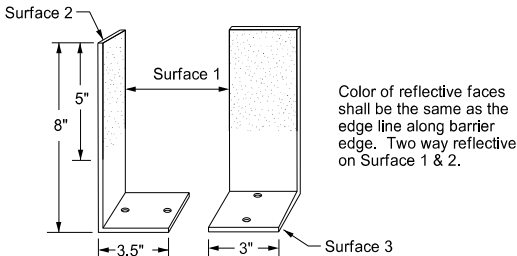


Barrier Marker Detail

Reflective Tape
The reflector shall be a retroreflective, acrylic microprism material with acrylic backing, 3" wide, providing the following minimum optical performance with an observation angle of 0.1' measured in candlepower:


Entrance Angle	Specific Intensity
Yellow - 4"	136
White - 4"	200

Adhesive
Markers shall be temporarily mounted to the portable concrete barrier with factory applied solid butyl rubber 1/8" thick, 2" wide on 2 1/4" wide release paper on surface 3.


Bar List				
Mark	Size	No.	Length	Shape
C1	4	6	9'-4"	Straight
U1	4	2	4'-8"	Bent
U2	4	2	4'-10 1/4"	Bent
U3	4	15	5'-4"	Bent

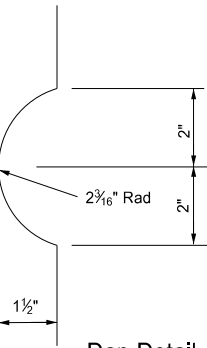


Dap Detail

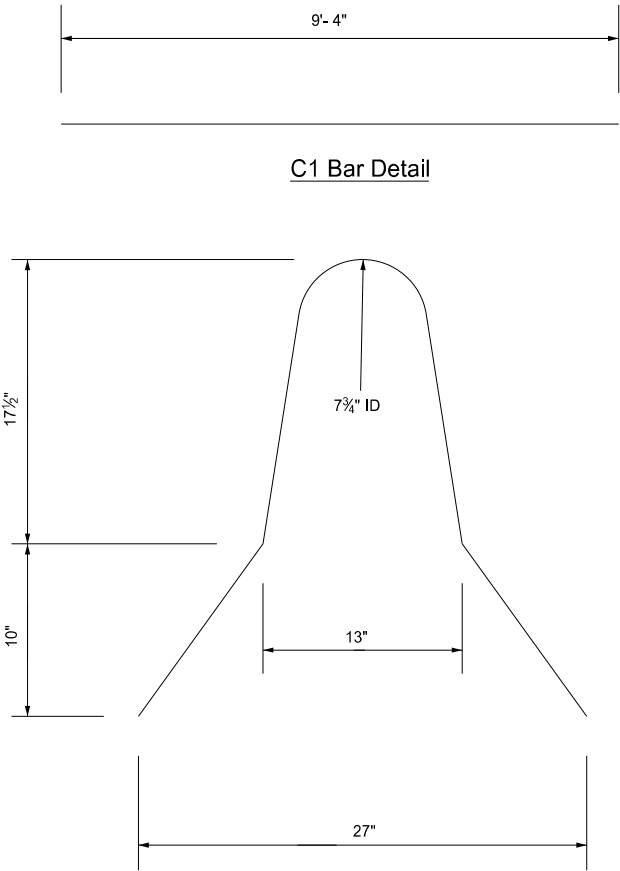

C1 Bar Detail

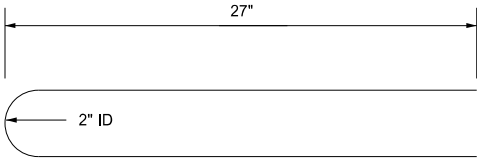

U1 Bar Detail

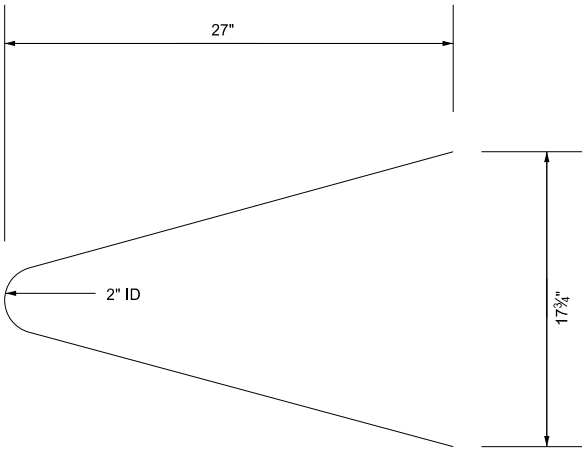

U2 Bar Detail

Marker Body
The marker shall be made of a high impact, weatherable engineering thermo-plastic material which conforms to the following:

Property	Result	ASTM Test Method
Thickness (min)	.090"	—
Tensile strength (min psi) @ yield	5,500	D638
Impact strength @ -20°F (ft-lbs/in of notch)	3.2	D256 Method A
Impact strength @ 73°F (ft-lbs/in of notch)	14.0	D256 Method A
Flexural strength, PSI 1/4" @ 73°F	8,000	D790
Flexural modulus, PSI 1/4" @ 73°F	300,000	D790
Elongation @ yield	30%	D638

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-20-12	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel
Registration Number
PE- 2930,
on 07/20/12 and the original document is stored at the
North Dakota Department
of Transportation